

P18445.P01

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P18445

Total Pages

Inventor(s) or Application Identifier  
Kiyoshi TOYODATitle: IMAGE COMMUNICATION APPARATUS, SERVER  
APPARATUS, AND CAPABILITY EXCHANGING  
METHOD

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

## APPLICATION ELEMENTS

## ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 54]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 22]
- ☒ Oath or Declaration [Total Pages 3]
  - a. ☒ Newly executed (original or copy) ☐ Unexecuted
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)  
[Note Box 5 below]
    - i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR 1.63(d)(2)  
and 1.33(b).
- ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy  
of the oath or declaration is supplied under Box 4b, is considered  
as being part of the disclosure of the accompanying application  
and is hereby incorporated by reference therein.
- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,  
Status still proper and desired
15. ☐ The prior application is assigned of record to \_\_\_\_\_
16. ☒ Foreign priority claimed
  - a. ☒ Claim of Priority
  - b. ☒ Certified Copy of Priority Document(s)
17. ☐ Other: \_\_\_\_\_

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.
19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a \_\_\_ continuation-in-part, \_\_\_ continuation, \_\_\_ division, of Application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.

Address all future correspondence to **Customer No. 7055** at the present address of:

GREENBLUM &amp; BERNSTEIN, P.L.C.

1941 Roland Clarke Place  
Reston, VA 20191  
(703) 716-1191

Date

Signature

Bruce H. Bernstein, Reg No. 29,027

Typed or Printed Name

# SPECIFICATION

Image Communication Apparatus, Server Apparatus, and  
Capability Exchanging Method

BACKGROUND OF THE INVENTION

Field of the Invention

5           The present invention relates to an image  
communication apparatus capable of transmitting data via  
the Internet, and more specifically to an image  
communication apparatus for transmitting an image after  
obtaining capability of a destination terminal on the  
10 Internet, a server apparatus for providing capability  
of the destination terminal, and a capability exchanging  
method.

Description of the Related Art

15           In conventional facsimile apparatuses, a G3  
facsimile apparatus, which carries out data  
communications using an analog network, and a G4  
facsimile apparatus, which carries out data  
communications using a digital network such as ISDN, etc.,  
20 are generally used. Such facsimile apparatuses using  
the analog network and the digital network (hereinafter  
referred to as "public switched telephone network  
(PSTN)" in a word) are hereinafter called G3/G4 FAX. On  
the other hand, an Internet facsimile apparatus  
25 (hereinafter referred to as "IFAX"), that receives and  
transmits data over an Internet protocol, has been  
developed in recent years. Particularly, standardization of  
an e-mail type IFAX, which receives and transmits image

data using an e-mail transfer protocol, has been developed in IETF (Internet Engineering Task Force) and ITU (International Telecommunication Union).

The following will explain the case using SMTP  
 5 (simple mail transfer protocol) and POP (Post Office Protocol) 3 as a mail transfer protocol in transmitting data by an e-mail type IFAX.

IFAX transmits a mail to a SMTP server. The SMTP server transfers the mail to a POP3 server to which a  
 10 receiver belongs. The POP3 server stores the mail in a mail box of a destination.

Since data communications by IFAX is non-synchronously carried out, capability exchange cannot be executed between IFAX and a communication terminal  
 15 on the receiver side. For this reason, IFAX is intended to surely carry out communications by executing communications using a minimum function of a transmitter (sender) and the destination (receiver). As described in a document RFC2305 "A Simple Mode of Facsimile Using  
 20 Internet mail" (K. Toyoda et. al; March 1998) issued by IETF, the minimum function, which IFAX should possess, is defined as a "simple mode".

More specifically, the communication protocol is SMTP, and corresponds to MIME and a minimum set of a TIFF  
 25 file.

The minimum set is defined in the above RFC2305. In the TIFF file, there are five sets such as S, F, J, L, and M, depending on a facsimile mode and a profile

supporting the TIF file. Among these sets, the lowest one is the profile S, that is, the minimum set.

More specifically, the following points can be defined.

5           The minimum set supports a monochrome image.

A compression format is a MH (Modified Huffman coding);

A CPU is an Intel system;

A width of paper is 1728 (corresponding to A4 size);

10          Resolution is 100 dpi or 200 dpi; and

A data list is LSB.

However, in communications using the simple mode, only the minimum function can be used. For this reason, even if both a transmitter terminal and a destination  
15          terminal have the function more than the simple mode, communications is carried out using the minimum function.

To solve such a problem, there is considered a communication system in which capability information of  
20          a terminal to be used as a destination terminal is registered in a server in advance such that the transmitter terminals can obtain capability information of the destination terminals from the server. For example, in the Unexamined Japanese Patent  
25          Publication No. Hei 10-334007 (corresponding to U.S. Patent Application No. 09/084,938 filed on May 28, 1998), such a communication system is disclosed. According to IFAX described in the above publication, since

capability information of the destination terminals can be obtained before transmission is started, communications suitable for the capability of the destination terminals can be carried out.

5           However, in the above publication, a system for registering capability of a self-apparatus to a server is disclosed, a way for registering capability of a communication apparatus other than the self-apparatus is not disclosed therein. In conventional, in order to  
10       register capability information of desired destination terminal to a server, the user must obtain capability information of the destination terminal by some method and register it to the server by the user. For this reason, this forces the user to perform extremely  
15       complicated operations.

#### SUMMARY OF THE INVENTION

          An object of the present invention is to provide an image communication apparatus in which capability information of a destination terminal can be obtained  
20       in a terminal on a transmitter side so as to be automatically registered to a server and operation efficiency of a server registration of capability information can be improved.

          Also, an object of the present invention is to  
25       provide a server apparatus, which receives registration of capability information of a destination terminal from the image communication apparatus.

          Also, an object of the present invention is to

provide a capability registration method in which capability information of a destination terminal can be obtained in a terminal on a transmitter side so as to be automatically registered to a server and operation efficiency of a server registration of capability information can be improved.

When the image communication apparatus of the present invention requests capability information of the destination terminal of a first server and no capability information of the destination terminal is registered in the first server, the image communication apparatus of the present invention requests capability information of a second server having capability information of a network terminal registered in advance or a server group directly or via the first server, and registers obtained capability information non-registered in one server to one server.

According to the present invention, since a function of obtaining capability information of a destination and a function of registering obtained capability information to a server are provided in the image communication apparatus, capability information of a destination terminal can be obtained and registered to a server automatically in a terminal on a transmitter side, and registering operations by a user can be reduced.

The above object can be achieved by an image communication apparatus having capability obtaining

means for making inquiry to the other server apparatus so as to obtain capability information in accordance with the other server when inquiry about capability which a destination possesses is made to one server apparatus and the one server apparatus has no capability information of the destination; and capability registering means for registering capability information obtained from the other server apparatus to the one server apparatus.

10           The above object can be achieved by a server apparatus having a capability information storing section for storing at least one of a mail address of a communication apparatus and a telephone number thereof in association with capability; a capability information  
15           providing section for providing capability information in accordance with inquiry from the image communication apparatus; receiving means for receiving capability information of the other communication apparatus from the communication apparatus; and registering means for  
20           registering received capability information to the capability information storing section.

          The above object can be achieved by a server apparatus having a capability information storing section for storing at least one of a mail address of  
25           a communication apparatus and a telephone number thereof in association with capability; a capability information providing section for providing capability information in accordance with inquiry from the image communication



apparatus; capability obtaining means for making inquiry to the other server apparatus so as to obtain desired capability information when there is no capability information subjected to the inquiry in the capability information storing section; and registering means for  
5 registering capability information obtained by the capability obtaining means to the capability information storing section.

The above object can be achieved by a method for  
10 registering capability of an image communication apparatus to a server apparatus, having making inquiry about capability which a destination possesses to one server apparatus; obtaining capability information by making inquiry to the other server apparatus when the  
15 one server apparatus has no capability information of the destination stored; and registering the obtained capability information to the one server apparatus.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the  
20 invention will appear more fully hereinafter from a consideration of the following description taken in connection with the accompanying drawing wherein one example is illustrated by way of example, in which;

FIG. 1 is a system structural view of a  
25 communication system according to a first embodiment of the present invention;

FIG. 2 is a hardware configuration view of IFAX according to the first embodiment of the present

invention;

FIG. 3 is a functional block view in which a part of functions of IFAX according to the first embodiment of the present invention is extracted;

5        FIG. 4 is a structural view of a destination information table according to the first embodiment of the present invention;

10       FIG. 5 is a structural view of a capability exchange table according to the first embodiment of the present invention;

FIG. 6 is a structural view of a zone information table according to the first embodiment of the present invention;

15       FIG. 7 is a sequence view for a capability exchange according to the first embodiment;

FIG. 8 is a view showing the structure of a domain name management in DNS;

20       FIGS. 9 and 10 are flowcharts for obtaining capability information according to the first embodiment of the present invention;

FIG. 11 is a flowchart for registering capability information according to the first embodiment of the present invention;

25       FIG. 12 is a flowchart showing operations for inquiry about capability in a server according to the first embodiment of the present invention;

FIG. 13 is a flowchart showing operations for a capability registration in the server according to the

first embodiment of the present invention;

FIG. 14 is a flowchart showing operations in a DNS server according to the first embodiment of the present invention;

5        FIG. 15 is a flowchart showing operations for which IFAX selects a server to which inquiry should be made in a communication system according to a second embodiment of the present invention;

10       FIG. 16 is a flowchart showing operations for which IFAX registers capability information in a communication system according to a third embodiment of the present invention;

15       FIG. 17 is a sequence view for a capability exchange in a communication system according to a fourth embodiment of the present invention;

FIG. 18 is a functional block view in which a part of functions of IFAX according to a fifth embodiment of the present invention is extracted;

20       FIG. 19 is a structural view of a destination information table according to the fifth embodiment of the present invention;

FIG. 20 is a structural view of a capability exchange table according to the fifth embodiment of the present invention;

25       FIG. 21 is a flowchart showing the first half of operation for obtaining capability information according to the fifth embodiment of the present invention; and

FIG. 22 is a flowchart showing operations for registering capability information according to the fifth embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE

#### 5 PREFERRED EMBODIMENTS

Embodiments of the present invention will now be specifically described with reference to the accompanying drawings.

#### (First embodiment)

10 FIG. 1 shows a network structure of a communication system according to a first embodiment. In this figure, there is shown a state in which a first LAN 10A and a second LAN 10B are communicably connected to each other via the Internet 1.

15 A plurality of network terminals including an IFAX 11A and a personal computer 12A is connected onto the first LAN 10A. The network terminal is a communication apparatus that conducts communications in accordance with a communication protocol communicable on the  
20 Internet 1.

Moreover, a server 13A, a domain name system (hereinafter referred to as "DNS") server 14A, and a mail server 15A are arranged onto the first LAN 10A. The server 13A provides capability information of a  
25 destination terminal to the IFAX 11A. The DNS server 14A is a name server, which manages a domain name of IFAX 11A, and capability information of the network terminals existing in a zone (first LAN 10A in this embodiment)

is registered therein. The mail server 15A has a mail box of network terminals existing in the first LAN 10A on one hand, and a function of transferring an e-mail transmitted from these network terminals to the mail  
 5 server having a mail box of a destination terminal on the other hand.

An IFAX 11B, a terminal 12B, a DNS server 14B, a mail server 15B, etc., are connected onto the second LAN 10B. The DNS server 14B is a name server, which manages  
 10 a domain name of IFAX 11B, and capability information of the network terminals existing in a zone (second LAN 10B in this embodiment) is registered therein. The mail server 15B has a mail box of network terminals existing in the first LAN 10B on one hand, and transfers an e-mail  
 15 transmitted from these network terminals to the mail server having a mail box of a destination terminal on the other hand.

A high DNS server 16, a WWW server 17, etc., are arranged on the Internet 1. The high DNS server 16 is  
 20 a name server that manages a domain name of a high position of a hierarchical structure, i.e., tree structure) in which domain names are hierarchically arranged like a tree. A domain name of a low hierarchy that DNS servers 14A, 14B manage is provided under the domain name of the  
 25 high hierarchy that the high DNS server 16 manages. The WWW server 17 registers a transmitting image in a case described later.

FIG. 2 shows a hardware configuration of IFAX 11A.

A CPU 21 executes a program, and controls the entire apparatus. A ROM 22 stores the program executed by the CPU 21. A RAM 23 is a main memory, which executes the program and temporarily stores various kinds of data such as an e-mail, an image file, etc. A scanner 24 scans an original, and obtains image information. A printer 25 prints out received image information. A FAX section 26 receives and transmits data by facsimile communications, and performs modulation/demodulation processing when data is received and transmitted on a telephone network (PSTN/ISDN) 27. A network control section 28 is an interface that executes procedures necessary for receiving and transmitting the e-mail over the Internet 1. A panel section 29 has a plurality of One-touch dialing keys and a plurality of touch panels, and receives operations of a designation of a destination terminal, an instruction of a transmission start, etc., which are done by an operator. A data processing circuit 20 comprises a plurality of processing blocks such as a compression/decompression section, a scaling section, a resolution converting section, an encryption processing section, and a color/monochrome section, etc. An operation of each processing block is controlled by the CPU 21.

In FIG. 3, there is shown a functional block in which a specific function, which is realized by executing the program, is extracted. In IFAX 11A, an image signal of an image scanned by the scanner 24 is input to the data

processing circuit 20. A capability exchange section 31 has a function of obtaining capability information of a destination terminal by use of a capability exchange operation to be described later. In the respective  
 5 processing blocks provided in the data processing section 20, CPU 21 control their operation sequence in accordance with the capability of the destination terminal. For example, the compression/decompression section compresses the image signal in a compression format with  
 10 which the destination terminal can deal. When IFAX 11A has a color function but must send a monochromatic image since the destination terminal has no color function, the color/monochrome section of IFAX 11A can convert a color image to a monochromatic image.

15 An e-mail generation section 32 generates an e-mail including image data output from the data processing section 20. The e-mail generation section 32 converts image data to a TIFF file. The TIFF file can store a plurality of compressed data corresponding to a  
 20 plurality of pages with one file. A destination address of the e-mail according to an input from the panel section 29 is sent to the e-mail generation section 32. Next, an e-mail including one or a plurality of TIFF files as an appended file is generated. In other words, the TIFF  
 25 file is text-coded, and put into a data section of a multi part mail in accordance with, for example, MIME (Multipurpose Internet Mail Extensions). Thereafter, the e-mail generated by the e-mail generation section

32 is transmitted to a mail server via the network control section 28 by a mail transmitting section 33.

While, a mail receiving section 34 receives an e-mail from the mail server 15A. The received e-mail is  
 5 input to an e-mail analyzing section 35. The e-mail analyzing section 35 binary-converts an appended file portion of the received e-mail, which has been text-coded. The appended file portion binary-converted is decompressed from the TIFF file to an image signal by  
 10 unit of page.

The data processing circuit 20 processes the image signal input from the e-mail analyzing section 35. For example, if the image signal is one that is compressed, the compression/decompression section decompresses the  
 15 image data in a decompression format corresponding to a compression format, and the encryption processing section decodes encrypted data so as to be decompressed. The decompressed image signal is output to the printer 25. It should be noted that compressed image data is  
 20 output to the FAX section 26 when an instruction about transfer to the other facsimile apparatus is included in the received e-mail.

Destination terminal information is pre-registered in a destination information table 36. FIG.  
 25 4 shows a specific example of destination terminal information registered in the destination information table 36. Destination terminal information includes a number of an One-touch dialing key allocated to each



destination terminal, a telephone number, a mail address, etc.

A capability registration section 37 has a function of registering capability information of the destination terminal newly obtained to the server 13A. An instruction of registration and capability information are input to the capability registration section 37 from the capability exchange section 31. The capability registration section 37 gains access to the server 13A via the network control section 28.

The server 13A has a function of notifying the capability exchange section 31 of capability information about the destination terminal in response to inquiry from the capability exchange section 31. The server 13A stores capability information about the destination terminals in a capability exchange table 50. Also, the server 13A registers capability information whose registration is requested from the capability registration section 37 into a capability exchange table 50.

FIG. 5 shows a configuration example of the capability exchange table 50. In the capability exchange table 50, one or a plurality of names of the kind of destination terminal is registered to be associated with the mail address of the destination terminal. Capability of the destination terminal is determined in accordance with the kind of destination terminal. In the capability exchange table 50, a

capability table is prepared for each kind of destination terminal. In the capability table, there are described capability items such as resolution, a paper size, a compression format, an encryption format, color, and the other, and a capability content corresponding to each capability item.

In this way, by managing the capability of the destination terminal by the name of kind of apparatus, a data capacity of the capability exchange table 50 can be reduced as compared with a case in which capability information is registered for each destination terminal. The destination terminal of the same kind of terminal is regarded as the terminal that has substantially the same capability. Therefore, if the capability of the destination terminal is managed by the name of the kind of apparatus, overlaps of data can be avoided, and data can be managed with efficiency.

The DNS server 14A has a function of managing a domain name, and a function of managing the capability of a network terminal. A zone information table for realizing the above two functions is stored in an internal memory 60A of the DNS server 14A. The structure of the zone information table is shown in FIG. 6. The zone information table comprises a plurality of records including a MX (Mail Exchange) record, an A (address) record, and a FX (Fax Exchange) record, which is an expansion record. A delivery destination of a mail to an original (domain name: abc.co.jp) is described in the

MX record. The delivery destination of the mail to the domain name of abc.co.jp is mail-gate@abc.co.jp. In the A record, a host name, and an IP address corresponding thereto are described. The host name registered in the zone information table includes a mail server (mail-gate) of the zone, and IFAX (ifax1, ifax2). In the FX record expanded this time, capability information of IFAX is described. Capability information includes a name of the kind of IFAX, a paper size, color/monochrome, a compression format, an encryption format, resolution, and other information.

DNS comprises numerous DNS servers distributed on the Internet. The DNS servers are arranged along the tree structure of the domain name, and the DNS servers to which authority of managing the domain name is given for each hierarchy of the sub-domain are present. The range of the domain name managed by one DNS server is called zone.

According to this embodiment, the capability of the network terminal (IFAX 11A or 11B) existing in the zone where the DNS server (14A or 14B) manages the domain name is described in the FX record. Therefore, if the capability of the network terminal existing in the zone is registered in each DNS server, capability information of each network terminal is registered in any one of DNS servers. Since DNS can search for the DNS server managing the domain name, it is possible to easily search for the DNS server in which capability information of a network terminal is registered from the mail address (domain

name) of the network terminal.

Next, the following will explain an operation, which is executed when the capability exchange is performed by the above-structured communication system.

5 In the explanation set forth below, it is assumed that IFAX 11A on the first LAN 10A is a transmitter terminal and IFAX 11B on the second LAN 10B is a destination terminal.

FIG. 7 shows one example of a sequence performed  
10 until IFAX 11A on the transmitter side obtains the capability of IFAX 11B on the receiver side from the server 14B. In other words, FIG. 7 shows the sequence of a case in which the capability information of IFAX 11B on the receiver side is not registered in the server  
15 13A.

The IFAX 11A makes inquiry about capability information of a desired destination terminal (IFAX 11B) to the server 13A. In this example, capability information of the desired destination terminal is not  
20 registered in the server 13A. Therefore, the server 13A sends back a response in which no capability information is registered to IFAX 11A.

Next, IFAX 11A makes inquiry about capability of the destination terminal to the DNS server 14A, which  
25 manages the self-domain name, by use of a name resolver (client software for DNS). The inquiry about capability information is carried out using a command for requesting capability information and a mail address of the

destination terminal.

The structure of the domain name management in DNS will be explained with reference to FIG. 8. The DNS server 14A manages a domain name (abc: third hierarchy) in a zone A, and the DNS server 14B manages a domain name (cba: third hierarchy) in a zone B. The high DNS server 16 manages a domain name (co: second hierarchy) in a zone C including DNS servers 14A and 14B therein.

A case in which the IFAX 11A makes inquiry to the DNS server 14A, which manages the zone A by use of the domain name (cba.co.jp) of IFAX 11B will be explained. The DNS server 14A makes inquiry to the high DNS server 16, which manages the domain name (co: second hierarchy) of the zone C to which the DNS server 14A belongs since the domain name (cba) is not included in the zone A. An IP address of the high DNS server 16, which manages the domain name of the zone C, is one that is cached at an initial obtaining time.

The high server DNS 16 grasps the domain names (third hierarchy), which are managed by the low DNS server belonging to the zone C. For this reason, the high DNS server 16 can see that the domain name (cba) inquired is managed by the DNS server 14B. The DNS server 14A is notified of the IP address of the DNS server 14B from the high DNS server 16. DNS can thus surely know the IP address of the DNS server, which manages a desired domain name by going back to the high DNS server.

The DNS server 14A, which has received inquiry from

the IFAX 11A, sends back a response of corresponding capability information to the IFAX 11A when the inquiry can be solved by a zone information table 60A, which the DNS server 14A itself has. In this example, capability  
 5 information of the destination terminal is not registered in the DNS server 14A. In an unsolvable case, that is, a case of inquiry about a domain name of a zone other than the self-zone, inquiry is made to the high DNS server 16. This inquiry is referred to as recursion.

10 When the high DNS server 16, which has received inquiry, finds out a DNS server, which seems to grasp a corresponding domain name, the DNS server 16 notifies the DNS server 14A of an IP address of the DNS server. When the high DNS server 16 cannot specify the DNS server,  
 15 which seems to grasp the corresponding domain name, the DNS server 14A makes inquiry about capability to higher DNS server.

The IP address of the DNS server 14B, which manages the domain name included in the mail address of the  
 20 destination terminal (IFAX 11B), is thus obtained. The DNS server 14A makes inquiry about capability of the destination terminal (IFAX 11B) to the DNS server 14B by use of the obtained IP address.

As mentioned above, capability information of the  
 25 destination terminal (IFAX 11B) is registered in the DNS server 14B, which manages the domain name of the desired destination terminal (IFAX 11B). Therefore, the DNS server 14B gives a response of capability information

of the desired destination terminal to the DNS server 14A. The DNS server 14A transmits the obtained capability information of the destination terminal to the IFAX 11A.

5 Also, in DNS, even if the low DNS server(14A) , which has received inquiry from the client, makes inquiry to a route server, which manages a top domain directly, it is possible to search for an IP address of a DNS server, which manages a desired domain name. In this case, the

10 route server transmits an IP address of a high DNS server, which manages the domain name (jp) of the first hierarchy, to the low DNS server (14A). Sequentially, when the low DNS server (14A) makes inquiry to the high DNS server, which manages the domain name (jp) of the first hierarchy,

15 the IP address of the high DNS server 16, which manages the domain name (co) of the second hierarchy, is transmitted to the low DNS server (14A). Moreover, when the low DNS server (14A) makes inquiry to the low DNS server 16, the IP address of the low DNS server 14B, which

20 manages the domain name to which the desired destination terminal belongs, is transmitted to the low DNS server (14A).

FIGS. 9 and 10 are flowcharts showing a series of processing, which is from the time when IFAX 11A makes

25 inquiry about capability information to the time when an image is transmitted. A destination is designated by the panel section 29 and a transmission instruction is input (ST901). When the destination terminal is a

network terminal, a mail address, a telephone number (IFAX) or an One-touch dialing key number are input. Also, when the destination terminal is a G3 facsimile apparatus, a telephone number or an One-touch dialing  
 5 key number is input.

In step ST902, the capability exchange section 31 recognizes that the destination terminal is the network terminal when the mail address is input. In a case where the telephone number or the One-touch dialing key number  
 10 is input, it is determined whether or not the destination terminal is the network terminal using the destination information table 36. If the same data as the input telephone number or the One-touch dialing key number is registered in the destination information table 36 and  
 15 a mail address corresponding to such data is registered therein, the destination terminal is recognized as a network terminal. In the other cases, it is determined that the destination terminal is the G3 facsimile apparatus.

20 In step ST902, when it is determined that the destination terminal is the G3 facsimile apparatus, the FAX section 26 carries out capability exchange in accordance with a normal facsimile procedure. Then, the data processing circuit 20 provides processing, which  
 25 is suitable for the capability of a destination FAX, to an image signal, thereafter such an image signal is transmitted to a telephone network from the FAX section 26 (ST903).



When it is determined that the destination terminal is the network terminal in step ST902, inquiry about capability information of the destination terminal is made to the server 13A via the LAN control section 28 (ST904). An HTTP protocol can be used in communications between IFAX 11A and the server 13A.

It is possible to request only capability information of an arbitrary item from capability information registered in the capability exchange table 50 of the server 13A. For example, when information of the paper size and the encryption format are not needed, item numbers of the paper size and the encryption format and filtering instruction data are added to a command for requesting capability information. As a command, a CGI command can be used. A request for CGI processing for filtering capability information is given to the server 13A.

If capability information of the destination terminal is registered in the capability exchange table 50 of the server 13A, IFAX 11A is notified of capability information from the server 13A. If capability information of the destination terminal is not registered in the capability exchange table 50 of the server 13A, IFAX 11A is notified of a message in which no capability information is registered from the server 13A. In this example, it is assumed that capability information is not registered in the server 13A.

IFAX 11A can obtain the part of capability

information stored in the server 13A. When filtering of capability information is instructed as a result of analyzing a CGI string from the IFAX 11A and filtering of capability information is instructed, the server 13A  
5 starts an application and deletes capability information of the instructed item from capability information. Then, filtered capability information is transmitted to the IFAX 11A as a response.

In this embodiment, the capability exchange  
10 section 31 recognizes that no capability information of the desired destination terminal is registered in the server 13A from the message received from the server 13A (ST905). In a case where no capability information of the desired destination terminal is registered in the  
15 server 13A, a server registration flag is set to flag = 1 (ST906). The server registration flag is a flag showing that capability information is registered in the server 13A after capability information is obtained.

In ST905, when it is determined that no capability  
20 information of the desired destination terminal is registered in the server 13A, inquiry about capability information of the destination terminal is made to the DNS server 14A, which manages the domain name of the same zone (A), by use of the mail address of the destination  
25 terminal (ST907). The inquiry about capability information is made using a command for requesting capability information and the mail address of the destination terminal (IFAX 11B). As explained above,

the destination DNS server (14B), which manages the domain name of the destination terminal (IFAX 11B), is determined at the point where the network of the DNS server goes back to one higher DNS server 16. The DNS  
 5 server 14A of a demander is notified of the IP address of the destination DNS server 14B from the high DNS server 16. The DNS server 14A obtains capability information from the destination DNS server (14B) as mentioned above and transmits it to IFAX 11A.

10       The capability exchange section 31 of IFAX 11A obtains capability information of the destination terminal from the DNS server 14A (ST908). Thereby, it possible to surely obtain capability information only by making inquiry to the DNS server even if capability  
 15 information of the destination terminal is not registered in the server 13A, which is first inquired. The reason is that capability information of the destination terminal is registered in the DNS server, which is searchable by the mail address of the  
 20 destination terminal.

Here, there is an encryption function as one of capabilities, which the network terminal has. The IFAX 11A can encrypt transmitting data by a predetermined encryption format to increase the security of data to  
 25 be transferred on the Internet. The encryption can be instructed to the capability exchange section 31 by a button operation from the panel section 29. If an encryption decoding function is not mounted on the

destination terminal, the destination terminal cannot decode transmitting data. For this reason, whether or not the encryption decoding function, which corresponds to the encryption format on the transmitter side, is mounted on the destination terminal must be confirmed by capability exchange.

In step ST909, when it is determined that the encryption of the transmitting data is not instructed from the panel section 29, a processing sequence and a processing parameter in the data processing circuit 20 are determined (ST910). In this transmission, the processing section to be used in the data processing circuit 20 and the order of processing are determined by the processing sequence. The processing parameter determines parameters such as a scaling rate suitable for the paper size and resolution suitable for destination resolution, which are used in the processing section.

In step ST911, the capability exchange section 31 controls the necessary processing sections of the data processing circuit 20 in accordance with the processing sequence and the processing parameter determined in step ST910. An image signal to which processing suitable for the capability of the destination terminal is provided is output to the e-mail generation section 32. Then, the e-mail generation section 32 generates an e-mail including image data, and transmits it to the mail server 15B having a mail box for a destination terminal from

the mail transmitting section 33. Thus, communications, which is suitable for the capability of the destination terminal, is referred to as full mode transmission.

When it is determined that the encryption of the  
5 transmitting data is input from the panel section 29 in step ST909, it is determined whether or not an encryption function (including encryption decoding section) is contained in the capability information of the destination terminal previously obtained (ST912). As a  
10 result, if the encryption function is contained in the capability information of the destination terminal, processing goes to step ST910 and a processing sequence containing the encryption is determined.

While, if the encryption function is not contained in  
15 the capability information of the destination terminal, CPU 21 determines measures in accordance with an instruction table stored on the ROM 22 (ST913). In the instruction table, there is described a method of taking measures against a case in which no encryption function  
20 is mounted on the destination terminal, which receives transmitting data, which has been instructed to encrypted. As a result of referring to the instruction table, if inquiry to a manager's terminal is described as measures therein (ST914), a message relating to  
25 inquiry is transmitted to a predetermined manager's network terminal (ST915). The message relating to inquiry and an address of the manager's network terminal are given to the e-mail generation section 32. The

e-mail generation section 32 generates an e-mail including the message relating to the inquiry and a destination address to which the address of the manager's network terminal is inserted. The generated e-mail is  
5 transmitted to the manager's network terminal.

Also, as a result of referring to the instruction table, if a FAX transmission of transmitting data to the destination terminal is described as measures therein (ST916), transmitting data is sent to the destination  
10 terminal in a G3 mode by the FAX section 26 (ST917). In the FAX transmission in step ST917, the FAX section 26 carries out capability exchange in accordance with a normal facsimile procedure. A telephone number of the destination terminal is obtained from the destination  
15 information table 36.

Also, as a result of referring to the instruction table, if an output of a non-transmitted message is described as measures therein in step ST913, the non-transmitted message is displayed on a display of the  
20 panel section 29 (ST918). Or, the non-transmitted message is printed out by the printer 25 (ST918).

Thus, when an encryption decoding function corresponding to the encryption format on the transmitter side is not mounted on the destination  
25 terminal even though the instruction of decoding transmitting data is given, transmitting data can be prohibited from being transmitted onto the Internet without being encrypted.

It should be noted that communications moves to a simple mode transmission to be described later if capability information cannot be obtained for any reason in processing of step ST908. In this case, the capability exchange section 31 confirms that the encryption instruction is not input (ST919), thereafter determining the processing sequence of the data processing circuit 20 and the processing parameter to be suited to the capability as per a minimum set (ST920).  
 5    An image signal output from the data processing circuit 20 is converted to the e-mail by the e-mail generation section 32, and transmitted in accordance with the simple mode (ST921).  
 10

Also, when IFAX 11A obtains capability information non-registered in the server 13A by the above-mentioned capability exchange, IFAX 11A registers the capability information to the server 13A.  
 15

FIG. 11 shows a flowchart for registering capability information to the server 13A. The capability exchange section 31 determines whether or not the server registration flag is set to flag = 1 (ST1102) when obtaining capability information from an external section (ST1101). A case of flag = 1 shows the fact that no capability information is registered in the server 13A. In this case, the obtained capability information of the destination terminal and the mail address are stored in a specific address on the RAM 23 (ST1103).  
 20  
 25

A time zone where capability information is

registered in the server 13A is predetermined. According to the embodiment, a time zone where the operating ratio of the server 13A is reduced is set as a registration time zone in the capability registration section 37. By use of the time zone where the operating ratio of the server 13A is reduced, a possibility decreases where a capability registration operation and the other will be overlapped with each other. For this reason, capability information can be obtained without increasing a load on the server 13A. If the capability of the server 13A is sufficiently high, capability information may be registered to the server 13A at the time when new capability information is obtained. Or, when spare time is generated, capability information may be registered to the server 13A.

When current time is the registration time zone (ST1104), the capability registration section 37 extracts the capability information of the destination terminal and the mail address thereof from the specific address on the RAM 23. Then, the capability registration section 37 transmits a command for requesting a registration and registration information (capability information of the destination terminal and the mail address thereof) to the server 13A (ST1105). As a result, capability information is newly registered in the server 13A. Thereby, capability information of the destination terminal to which the capability exchange has been provided by the network terminal of the LAN 10A



is automatically registered to the server 13A.

Next, an operation of the server 13A will be explained. FIG. 12 is a flowchart showing a case in which the server 13A provides capability information. After  
 5 the server 13A receives inquiry about capability information from the IFAX 11A (ST1201). The server 13A searches the capability exchange table 50 for capability information using the mail address instructed from the IFAX 11A (ST1202).

10 The server checks whether or not capability information of the destination terminal is registered in the capability exchange table 50 (ST1203). If the capability information is not registered in the capability exchange table 50, the server 13A sends the  
 15 IFAX 11A as a client a response in which no capability information is registered (ST1204). Also, if the capability information is registered in the capability exchange table 50, the server 13A transmits capability information to the IFAX 11A (ST1205).

20 FIG. 13 shows a flowchart for registering capability information to the server 13A. The server 13A receives a registration request for capability information from the IFAX 11A (ST1301). If the server 13A finishes preparations, the server 13A transmits a  
 25 registration permitting signal to the IFAX 11A (ST1302). Thereafter, capability information (name of the kind of apparatus and capability table) of the network terminal and the mail address thereof are sent from the IFAX 11A

(ST1303). The server 13A makes the mail address of the network terminal and capability information corresponded to each other, and registers them in the capability exchange table 50 (ST1304). At this time, if  
 5 the capability table corresponding to the name of the kind of apparatus is already registered therein, only the name of the kind of apparatus may be registered thereto. Also, if a telephone number is also registered to the capability exchange table 50, it is possible to  
 10 search capability information even when not only the mail address but also the telephone number is used as a key. For that end, the IFAX 11A transmits data in which the telephone number is added to the capability information of the network terminal and the mail address thereof.

15 Next, an operation of the DNS server 14A will be explained. FIG. 14 is a flowchart showing a schematic operation of the DNS server 14A. The DNS server 14A receives inquiry about capability, which the IFAX 11B possesses, from the IFAX 11A belonging to the zone A (LAN  
 20 10A)(ST1401). The IFAX 11A makes inquiry using a command for requesting capability information and a mail address of a destination terminal (host: IFAX 11B).

The DNS server 14A determines whether or not the DNS server 14A can solve inquiry by itself (ST1402). If  
 25 the inquiry is one that is related to the domain name, which the DNS server 14A manages, the DNS server 14A determines that the inquiry is solvable. If it is determined that the inquiry is solvable in step ST1402,

the DNS server 14A determines whether or not an IP address of the host is requested (ST1403). If the IP address of the host is requested, the DNS server 14A extracts an IP address of a target host from the zone information table 60A (ST1404).

While, if it is determined that the IP address of the host is not requested in ST1403, it is determined whether or not capability information of the target host is requested (ST1405). If it is determined that capability information of the target host is requested in ST1405, capability information described in the FAX code in connection with the target host is extracted from the zone information table 60 (ST1406). If no host name is included in the mail address, capability information is obtained using a user. In this case, the user name is registered in a name item for a zone information table. In this case, the mail address or the user name is registered in a name item for a zone information table. In the case of the other inquiries, corresponding processing is executed in step ST1407.

If it is determined that the inquiry is unsolvable in step ST1402, the inquiry is transferred to the high DNS server 16 (ST1408). Since the IP address of the DNS server is sent from the high DNS server 16, the inquiry is output to the other DNS server using the IP address. The repetition of this processing obtains a response to the inquiry. Thus, the searching of desired information in place of the client is referred to as recursion.

The DNS server 14B has a zone information table 60B, which is structured in the same manner as the zone information table of FIG. 6, and operates in accordance with the flowchart of FIG. 14. In the zone information table 60B, capability information of IFAX 11B is described in the FAX record. For example, ifax1 registered in the table of FIG. 6 is the host name included in the mail address of IFAX 11B. Namely, capability information of IFAX11B is described in the FAX record corresponding to ifax1.

In a case where the DNS server 14B receives inquiry about IFAX 11B from the DNS server 14A, capability information is extracted from the FX record corresponding to the host name included in the mail address. Then, extracted capability information is transmitted to the DNS server 14A.

Though CPU is used in communications between the network terminal of inquiry and the DNS server, the other communication protocol may be used.

(Second embodiment)

The communication system according to a second embodiment has the same system structure as the communication system according to the first embodiment. In this embodiment, the IFAX 11A changes a server, which first obtains capability information, in accordance with an address of the destination terminal.

FIG. 15 is a flowchart showing a series of processing, which is from the time when IFAX 11A obtains

capability information from a server (server 13A or DNS server) to the time when information is transmitted. A mail address of a destination terminal is input (ST1501). Then, it is determined whether or not a domain name of the destination terminal is a domain name of the same system (ST1502).

Here, it is assumed that capability information of the network terminal of the same system including a network of LAN 10A is registered to the capability exchange table 50 of the server 13A. By checking the domain name of the network terminal, it is possible to determine whether or not desired capability information is registered in the server 13A before making inquiry to the server 13A.

If the domain of the destination terminal is the domain name of the same system in ST1502, inquiry about capability information is made to the server 13A (ST1503). In this case, there is a high possibility that desired capability information will be registered to the capability exchange table 50 of the server 13A. The server 13A checks whether or not the capability information of the destination terminal is registered in the capability exchange table 50 of the server 13A (ST1504). If the capability information is registered in the server 13A, processing moves to step ST1507 and a full mode transmission is carried out.

While, if the domain of the destination terminal is not the domain name of the same system in ST1502,

inquiry about capability information to the DNS server 14A is performed without making inquiry to the server 13A (ST1505). If capability information is obtained from DNS in the same manner as the aforementioned first  
 5 embodiment(ST1506), processing moves to step ST1507, and a full mode transmission is carried out. It should be noted that a simple mode transmission is carried out (ST1508), if capability information cannot be obtained from DNS for any reason (ST1506)

10 Thus, according to this embodiment, when the domain of the destination terminal was not the domain name of the same system, inquiry about capability information to the DNS server 14A was performed without making inquiry to the server 13A. Therefore, IFAX 11A can  
 15 obtain capability information with efficiency.

According to the above-mentioned embodiment, the server first obtaining capability information was selected in accordance with the domain name of the destination terminal. However, the server may be  
 20 selected in accordance with the other conditions. Also, according to the above-mentioned embodiment, the servers to be selected were the server 13A and the DNS servers in DNS. However, a plurality of servers corresponding to the server 13A is prepared and an optimum server may  
 25 be selected from these servers.

(Third embodiment)

The communication system according to a third embodiment has the same system structure as the

communication system according to the aforementioned first embodiment. This embodiment shows an example in which IFAX 11A automatically obtains capability information of the network terminal in which an address  
 5 is newly registered to the destination information table 36 and registers obtained capability information to the server.

When a user operates the panel section 29 so as to register a new address to the destination information  
 10 table 36 (ST1601), CPU 21 sets a capability obtaining flag to flag = 1 in association with the new address (ST1602). The capability obtaining flag = 1 means that the new address is registered.

Next, it is determined whether or not current time  
 15 is capability obtaining time (ST1603). If capability obtaining time comes, a mail address in which capability obtaining flag = 1 is set and capability registration should be made is extracted from the destination information table 36 (ST1604).

20 If the mail address in which capability registration should be made is extracted, IFAX 11A makes inquiry about capability of a communication apparatus in which the mail address is newly registered to the DNS server 14A, and obtains capability information (ST1605).

25 When IFAX 11A receives desired capability information from the DNS server inquired, the capability information is registered to the server 13A (ST1606). As a result, obtained capability information is

registered to the server 13A to which IFAX 11A first makes inquiry about capability information.

In processing in step ST1607, it is determined whether or not a mail address in which capability  
 5 registration should be carried out remains. Then, if a target network terminal remains, processing moves to step ST1605.

Thus, according to this embodiment, when a new address registration of the network terminal is carried  
 10 out in IFAX 11A, IFAX 11A automatically makes inquiry about capability information of the network terminal to DNS and obtains capability information, and obtained capability information can be registered to the server 13A to which IFAX 11A first gains access.

Also, by setting capability obtaining time to a time  
 15 zone where frequency in use of IFAX 11A is decreased, capability information can be registered to the server without putting an excessive load on the IFAX 11A. Or, by setting capability obtaining time to a time zone where  
 20 the operating ratio of the server is reduced, capability information can be registered to the server without putting an excessive load on the server.

Also, every time when the content of the destination information table 36 of IFAX 11A is updated, inquiry  
 25 about the updated capability of the communication apparatus is made to DNS and capability information is obtained, thereafter the capability exchange table 50 of the server 13A may be updated.



Also, inquiry about capability of the network terminal registered in the destination information table 36 of IFAX 11A is periodically made to DNS to be collected and the content of the capability exchange table 50 of the server 13A may be rewritten to the latest information corrected.

Also, IFAX 11A fetches the mail addresses of the network terminal stored in the capability exchange table 50 from the server 13A in accordance with the instruction from the user or periodically. Then, inquiry about each fetched mail address is made to DNS to collect capability information and the capability exchange table 50 of the server 13A may be rewritten.

(Fourth embodiment)

The communication system according to a fourth embodiment is an example in which a server makes inquiry about capability information to a DNS server. The communication system according to the fourth embodiment has the same system structure as the communication system according to the aforementioned first to third embodiments excepting the function used when the server 13A obtains capability information.

FIG. 17 shows a sequence view for obtaining capability information in the communication system according to this embodiment. IFAX 11A makes inquiry about capability information of a destination terminal (IFAX 11B) to the server 13A.

The server 13A, having the capability exchange

table 50, makes inquiry about capability to the DNS server 14A, which manages the domain name of IFAX 11A when desired capability information is not registered in the capability exchange table 50. The inquiry about  
 5 capability information is made using a command for requesting capability information and a mail address of a destination terminal. As a communication protocol between the server 13A and the DNS server 14A, an LDAP (Lightweight Directory Access Protocol) can be used.  
 10 The inquiry about capability information is made using inquiry/search function supported by LDAP. In this case, a communication destination is an LDAP server.

The low DNS server 14A does not manage the domain name included in the mail address of the destination  
 15 terminal. Then, the low DNS server 14A searches DNS for capability information in place of a client (server 13A). For this reason, the DNS server 14A forwards inquiry to the high DNS server 16 of the zone to which DNS server 14A belongs.

20 In this embodiment, the high DNS server 16 manages the domain of the DNS server 14B, which manages the domain name of the destination terminal. Therefore, the high DNS server 16 notifies the DNS server 14A of an IP address of the destination DNS server 14B.

25 The DNS server 14A gains access to the destination DNS server 14B using its IP address , and makes inquiry about capability of the destination terminal. As a result, the DNS server 14B extracts capability

information of the destination terminal from the zone information table 60B of the DNS server 14B, and notifies the DNS server 14A of the extracted capability information. Then, the DNS server 14A forwards  
5 capability information of the destination terminal to the server 13A. Moreover, the server 13A notifies IFAX 11A of capability information. Also, the server 13A registers capability information obtained from DNS to the capability exchange table 50.

10 Thus, according to this embodiment, the server 13A obtains capability information from DNS and notifies IFAX 11A of capability information. For this reason, IFAX 11A makes inquiry about capability information to the server 13A only one time, thereby capability  
15 information can be surely obtained.

Also, the server 13A obtains capability information from DNS and registers it to the capability exchange table 50 of the server 13A. For this reason, a load put on IFAX 11A relating to an external  
20 registration of capability information can be reduced, and the need for mounting the external registration function on IFAX 11A can be eliminated.

As a server to which the server 13A makes inquiry about capability, one or a plurality of servers other  
25 than DNS server may exist. If there is no desired capability information in one or the plurality of servers to which the server 13A has previously made inquiry, inquiry to DNS may be carried out. In this case, the

order of inquiry can be predetermined based on arbitrary conditions such as access time, domain names, etc.

(Fifth embodiment)

This embodiment shows an example in which  
 5 capability information of a part of the destination terminal is registered in IFAX. The communication system according to the fifth embodiment has the same system as the communication system according to the first embodiment.

10 FIG. 18 shows a functional block view of IFAX 11A. IFAX 11A comprises a destination information table 36 in which a name of the kind of apparatus is registered for each network terminal to which destination information is registered. FIG. 19 shows the  
 15 destination information table 36 to which the name of the kind of apparatus is registered. Also, a capability table 180 is prepared for each name of the kind of apparatus of the network terminal registered in the destination information table 36. FIG. 20 shows a  
 20 content of data registered in the capability table 180. In the capability table 180, the name of the kind of apparatus and a mount capability are registered in a pair.

Each apparatus other than IFAX 11A has the same  
 25 function as that of the aforementioned first embodiment, and the explanation will be omitted.

Next, the following will explain an operation for which the above-structured IFAX 11A obtains capability

with reference to FIG. 21. Similar to the first embodiment, in step ST901, a destination input from the panel section 29 and a transmission instruction are detected. In step ST902, the capability exchange section 31 recognizes that the destination terminal is the network terminal when a mail address is input. In a case where a telephone number or an One-touch dialing key number is input, it is determined whether or not the destination terminal is the network terminal using the destination information table 36. If it is determined that the destination terminal is the G3 facsimile apparatus in step ST902, a facsimile transmission from the FAX section 26 to a telephone network is carried out (ST903).

15 If it is determined that the destination terminal is the network terminal in step ST902, the destination information table 36 is checked (ST2101), and it is determined whether or not the destination terminal subjected to transmission instruction is one that is already registered in the destination information table 36 (ST2102).

It should be noted that the registration of the destination terminal to the destination information table 36 is confirmed in step ST902 when the telephone number or the One-touch dialing key number is input. For this reason, processing in steps ST2101, ST2102 can be skipped.

When it is confirmed that destination information

of the destination terminal is registered in step ST2102, whether or not capability information (name of the kind of apparatus) of the destination terminal is registered in the destination information table 36 is determined  
 5 (ST2103). If capability information is registered in the destination information table 36, corresponding capability information is extracted from the capability table 180 having the name of the same kind of apparatus by use of the name of the kind of apparatus. Then,  
 10 processing moves to step ST909 of FIG. 10, and a full mode transmission is prepared.

Thus, whether or not desired capability information is registered in an internal memory of IFAX 11A is first confirmed, and inquiry about capability  
 15 information is made to the external server 13A or DNS only when no capability information is registered. For this reason, as compared with a system in which inquiry about capability information is made to the external server 13A or DNS without exception, capability  
 20 information can be obtained with efficiency. In the case where capability information is registered in the internal memory of IFAX 11A, time required to obtain capability information can be reduced.

If it is confirmed that capability information of  
 25 the destination terminal is not registered in step ST2103, an internal registration flag is set to flag = 1 (ST2104). The case of flag = 1 shows that capability information of the destination terminal to be obtained is not

registered in the destination information table 36 of IFAX 11A and the capability table 180.

When inquiry about capability information of the destination terminal is made to the server 13A (ST904) and the result of inquiry shows that no capability information is registered in the server 13A (ST905), a server registration flag is set to flag = 1 (ST906) if the internal registration flag cannot be set. If the internal registration flag is set to flag = 1, processing moves to step ST907 without setting the server registration flag. The processing including and after step ST907 is already explained in FIGS. 9 and 10, and the explanation will be omitted.

FIG. 22 shows a flowchart for which IFAX 11A registers newly obtained capability information. If IFAX 11A obtains new capability information by the aforementioned capability exchange (ST1101), the state of the internal registration flag is checked (ST2201). At this time, it is determined whether or not a capability table, which corresponds to a name of the kind of apparatus newly registered, exists in the destination information table 36 as a capability table 180. If no capability table exists, a capability table, which corresponds to a name of the kind of apparatus newly registered, is added and registered. The content of the capability table is included in capability information obtained by the capability exchange. The capability table of the same name of the kind of apparatus exists

when the same name of the kind of apparatus is registered in the destination information table 36. It is unnecessary to register the capability table again.

Thereby, in connection with the network terminal  
 5 registered in the destination information table 36 of IFAX 11A, the capability information is surely registered in the destination information cable 36 and the capability table 180.

While, when the internal registration flag is not  
 10 set in step ST2201, the state of the server registration flag is checked in step ST1102. When the server registration flag is not set, no registration processing is not carried out since capability information of the destination terminal is registered in the capability  
 15 exchange table 50 of the server 13A. Conversely, if the server registration flag is set to flag = 1, capability information is temporarily stored (ST1103), and capability information is registered in the server 13A (ST1105) when registration time comes (ST1104).

20 Thereby, capability information of the network terminal, which has not been registered in the destination information table 36 of IFAX 11A and has been subjected to capability exchange previously, is automatically registered to the capability exchange table 50 of the  
 25 server 13A.

According to the embodiment of the present invention, there is a possibility that desired capability information will be registered in three



sections, that is, the internal memory (180) of IFAX 11A, server 13A, DNS. Moreover, capability information may be registered to the WWW server 17 placed on the Internet, which is easily accessible from the network terminal on  
5 the other network.

Thus, if a plurality of candidates for inquiry destination exists, it is possible to make inquiry about capability in order of precedence. For example, inquiry may be made in order of the candidate having the shortest  
10 access time. Or, inquiry may be made in order of the candidate having the highest possibility that capability information of the destination terminal will be stored. In this case, inquiry to DNS is finally made.

The above explained the case in which transmitting  
15 data was sent in accordance with the capability of the destination of terminal. However, if the capability of the destination terminal does not satisfy a predetermined condition, transmitting data may be registered to the WWW server 17 without being sent to  
20 the destination terminal directly. In this case, URL of the WWW server 17 is transmitted to the destination terminal by the e-mail. A user of the destination terminal uses the above URL sent from the network terminal on which capability higher than that of the  
25 destination terminal is mounted, and downloads transmitting data from the WWW server 17.

The present invention is not limited to the aforementioned embodiments. For example,

according to the above-mentioned embodiments, the facsimile apparatus was explained as a communication terminal. However, the scope of the present invention includes the other image communication apparatus. For example, the present invention includes a PC to which a LAN card or a modem is connected in order to make connection with the Internet. The scanner or the printer can be connected to the PC through an external section I/F. The present invention also includes a network scanner having a network communication interface, and a network copy machine. Moreover, the present invention includes an image combination machine comprising a scanner, a printer, a copy machine, a facsimile apparatus, etc.

Furthermore, the present invention includes a computer-readable storage medium having a program code causing a computer to execute the same processing as that of the facsimile apparatus according to the aforementioned embodiment.

The present invention is not limited to the above described embodiments, and various variations and modifications may be possible without departing from the scope of the present invention.

This application is based on the Japanese Patent Application No.HEI11-88236 filed on March 30, 1999, entire content of which is expressly incorporated by

reference herein.

What is claimed is:

1. An image communication apparatus comprising:  
capability obtaining means for making inquiry to  
the other server apparatus so as to obtain capability  
5 information in accordance with the other server when  
inquiry about capability which a destination possesses  
is made to one server apparatus and said one server  
apparatus has no capability information of said  
destination; and  
10 capability registering means for registering  
capability information obtained from said other server  
apparatus to said one server apparatus.
2. The apparatus according to claim 1, wherein  
said one server apparatus is a local server placed in  
15 the same local area network as that of said image  
communication apparatus, and the other server apparatus  
is a global server placed in a global network to which  
said local area network is connected.
3. The apparatus according to claim 1, wherein  
20 said other server apparatus is one of a plurality of  
capability servers, which spread and manage capability  
of a communication apparatus connectable to Internet on  
Internet.
4. The apparatus according to claim 3, wherein  
25 said capability server is a DNS server, which manages  
the capability information of said communication  
apparatus in association with a mail address of said  
communication apparatus.

5. The apparatus according to claim 1, wherein said capability obtaining means makes inquiry about the capability to said server apparatus at an image data transmitting time so as to obtain capability  
5 information.

6. The apparatus according to claim 1, further comprising:

a storing section for storing a mail address of a communication apparatus; and

10 first instructing means for instructing said capability obtaining means to obtain capability information of the communication apparatus having the mail address newly stored in said storing section.

7. The apparatus according to claim 1, further  
15 comprising:

a storing section for storing a mail address of a communication apparatus; and

second instructing means for periodically instructing said capability obtaining means to obtain  
20 capability information of the communication apparatus having the mail address newly stored in said storing section.

8. The apparatus according to claim 1, further comprising:

25 a storing section for storing a mail address of a communication apparatus; and

third instructing section for instructing said capability obtaining means to obtain capability

information of the communication apparatus having the mail address newly stored in said storing section when a content of said storing section is updated.

9. A server apparatus comprising:

5     a capability information storing section for storing at least one of a mail address of a communication apparatus and a telephone number thereof in association with capability;

10     a capability information providing section for providing capability information in accordance with inquiry from said image communication apparatus;

receiving means for receiving capability information of the other communication apparatus from said communication apparatus; and

15     registering means for registering received capability information to said capability information storing section.

10. A server apparatus comprising:

20     a capability information storing section for storing at least one of a mail address of a communication apparatus and a telephone number thereof in association with capability;

25     a capability information providing section for providing capability information in accordance with inquiry from the image communication apparatus described in claim 1;

capability obtaining means for making inquiry to the other server apparatus so as to obtain desired

capability information when there is no capability information subjected to the inquiry in said capability information storing section; and

registering means for registering capability information obtained by said capability obtaining means to said capability information storing section.

11. The apparatus according to claim 10, wherein said capability obtaining means makes inquiry to another server apparatus to obtain desired capability information when the other server apparatus has no desired capability information stored.

~~12~~. A method for registering capability of an image communication apparatus to a server apparatus, comprising the steps of:

15 making inquiry about capability which a destination possesses to one server apparatus;

obtaining capability information by making inquiry to the other server apparatus when said one server apparatus has no capability information of said destination stored; an

registering said obtained capability information to said one server apparatus.

## ABSTRACT OF THE DISCLOSURE

An Internet facsimile apparatus as a sender makes inquiry about capability, which a destination Internet facsimile apparatus possesses, to a local server in a local network. When the local server has no capability information of the destination stored, the sender makes inquiry to a DNS server higher than the local server and obtains capability information of the destination from the DNS server. Then, the sender registers the obtained capability information of the destination to a memory, which the local server or the sender has. This realizes that the sender can surely obtain capability information of the destination. Also, this makes it possible to automatically register capability information of the destination to the memory of the local server or the sender.



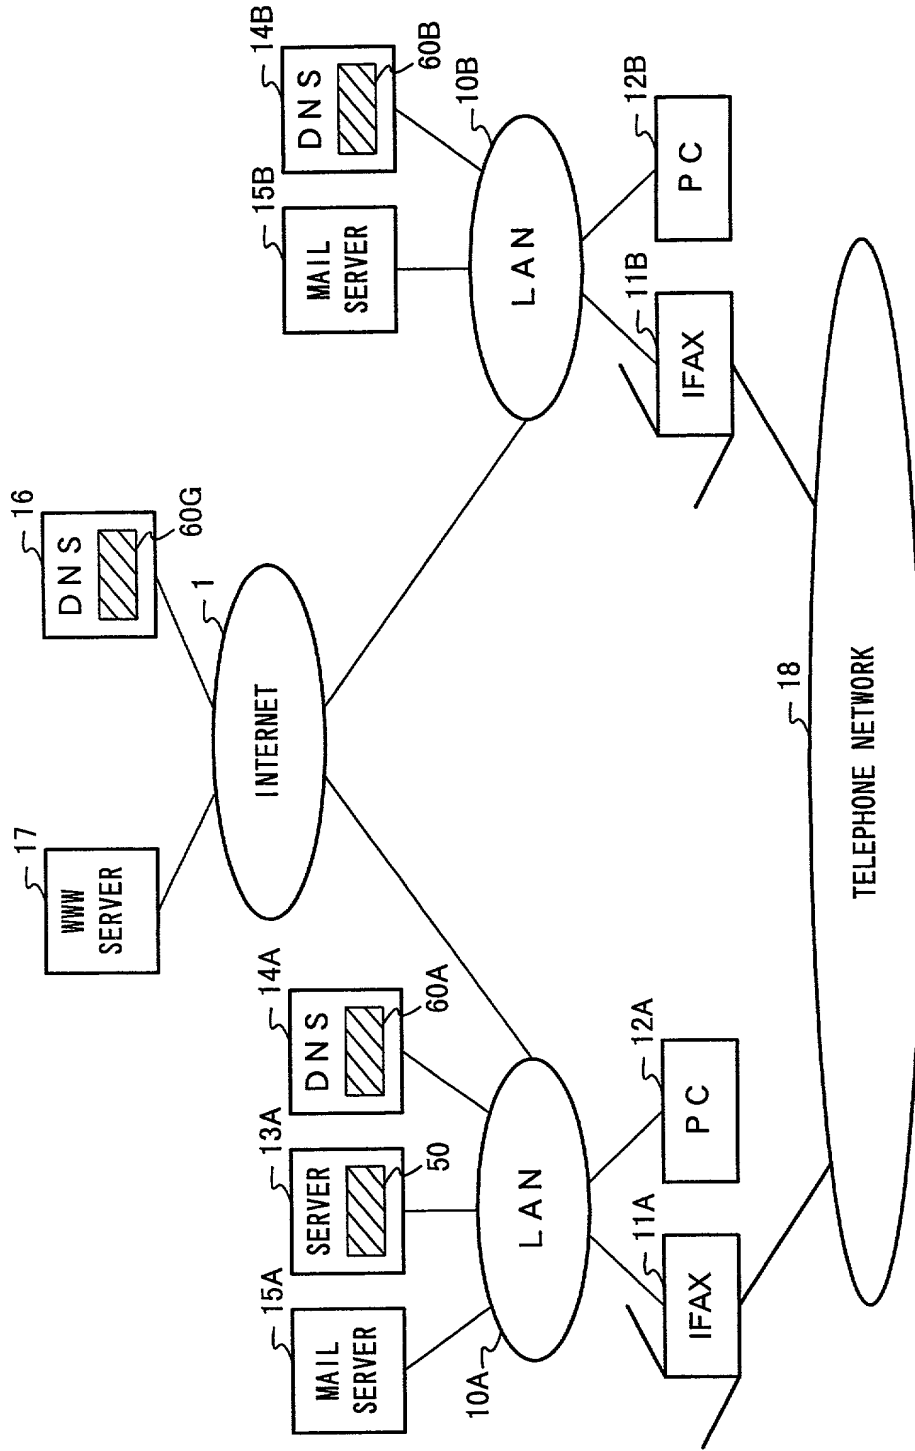


FIG. 1

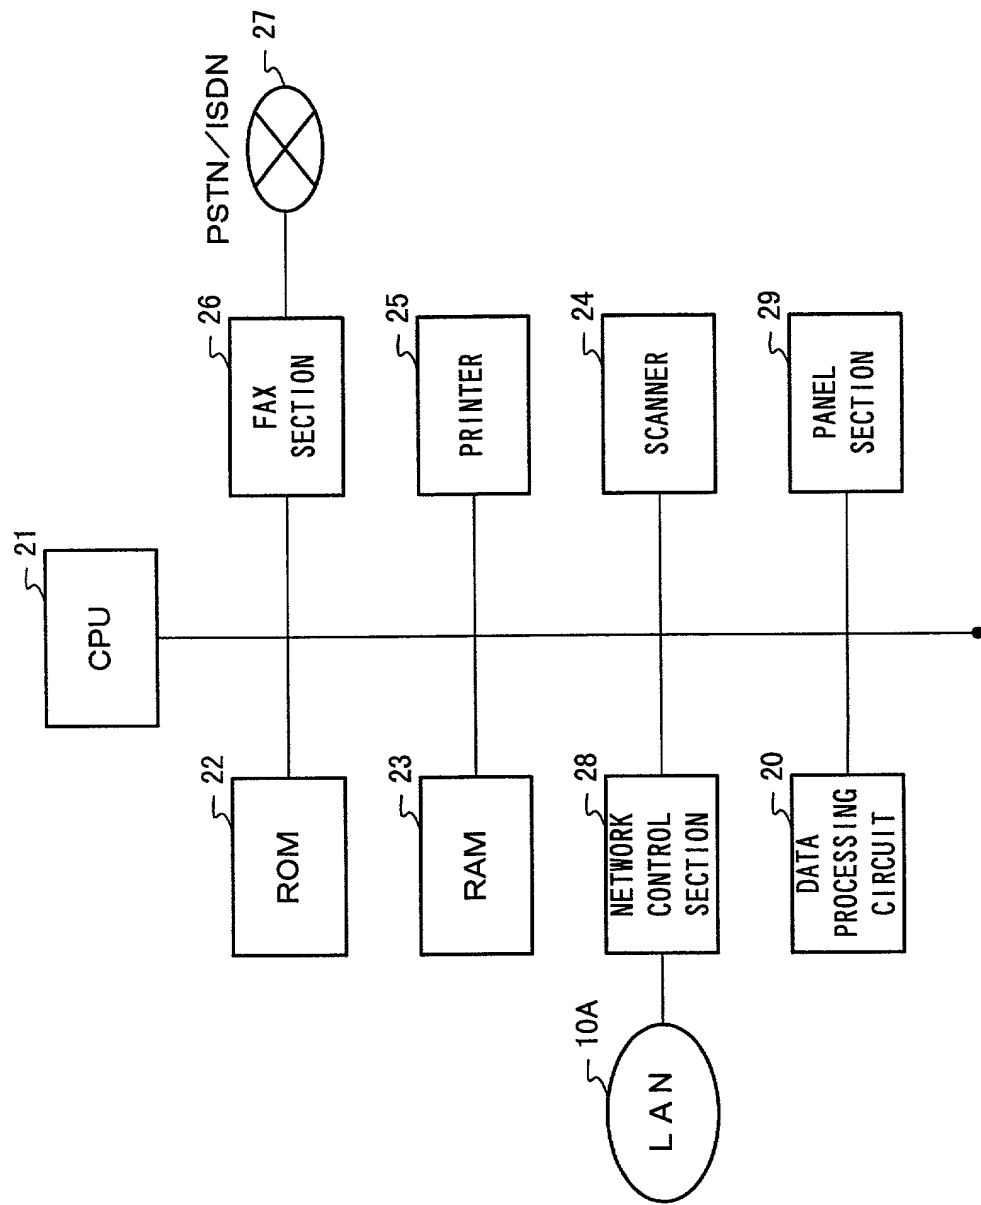


FIG. 2

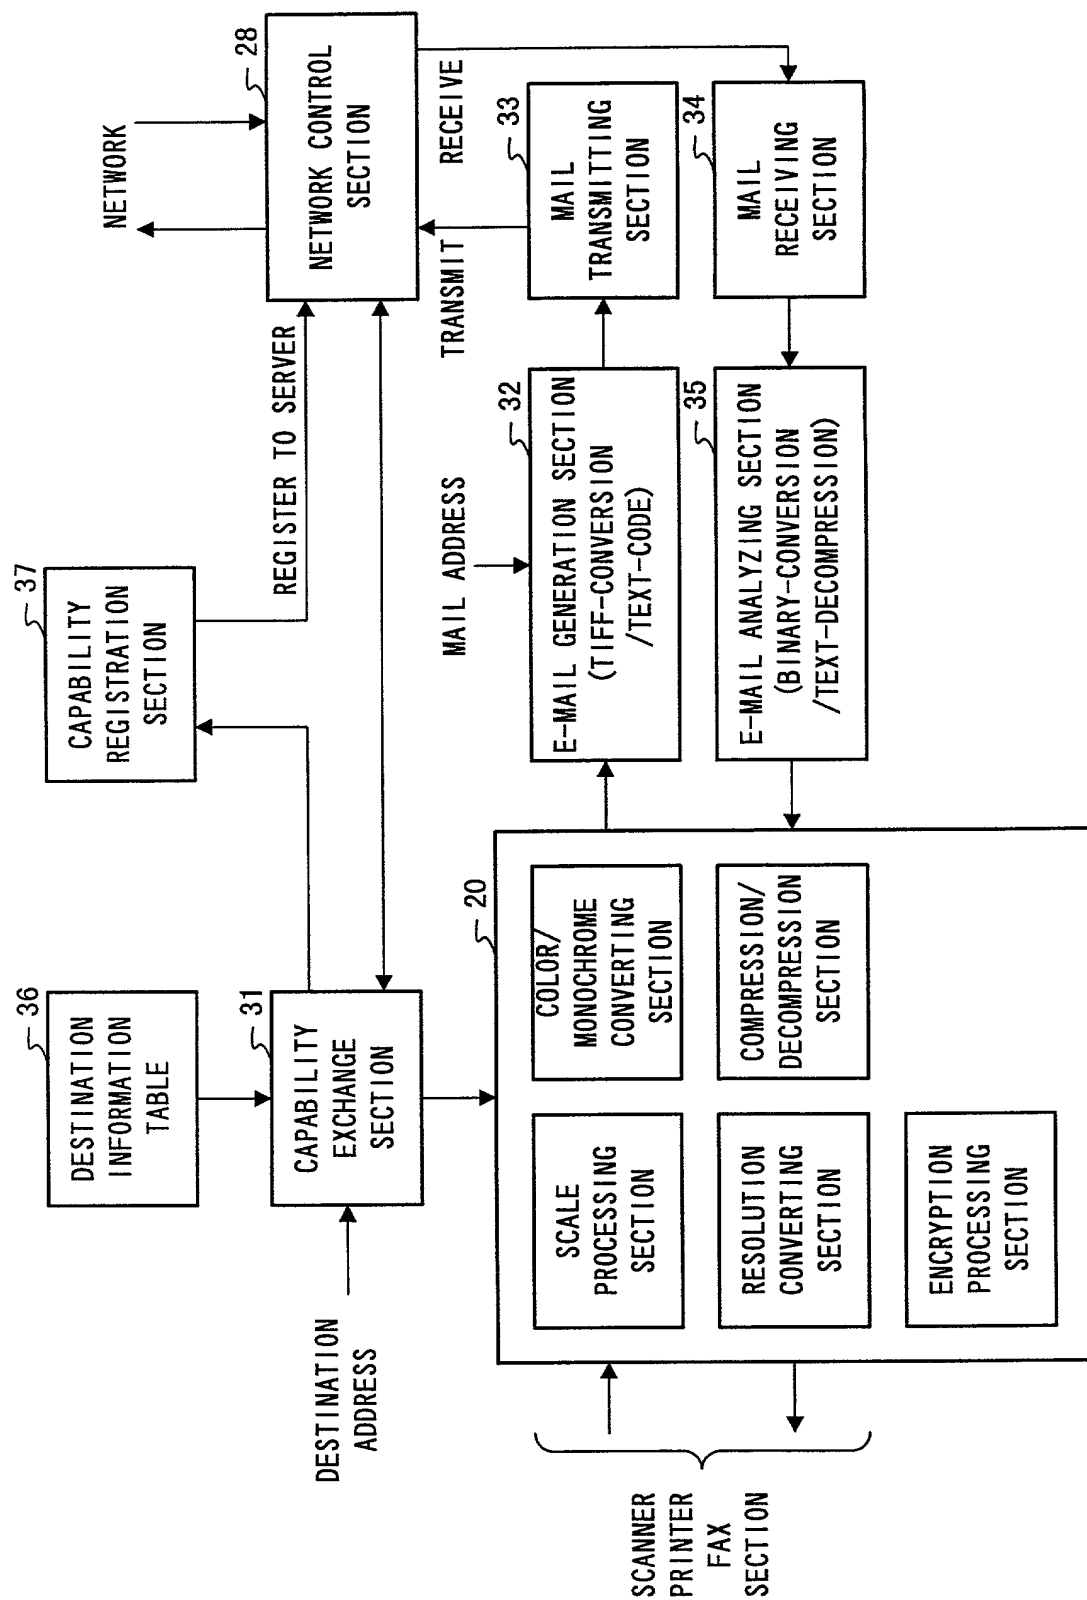


FIG. 3

DESTINATION INFORMATION TABLE

ONE-TOUCH DIALING KEY	TELEPHONE NUMBER	MAIL ADDRESS
0 1	03-XXX-0000	XX@00.CO.jp
0 2		△△@XX.CO.jp
0 3	04-△△-0000	

FIG. 4

CAPABILITY EXCHANGE TABLE(SERVER)

TELEPHONE NUMBER	MAIL ADDRESS	NAME OF KIND OF APPARATUS
03-XXX-0000	XXX@00.CO.jp	X X X X
	00@XX.CO.jp	X O O O
	.	.
	.	.
	.	.

KIND OF APPARATUS  
= X X X X

CAPABILITY ITEMS	CAPABILITY CONTENT
RESOLUTION	. . . . .
PAPER SIZE	A 4, A 3
COMPRESSION FORMAT	. . . . .
ENCRYPTION FORMAT	IMPOSSIBLE
COLOR	IMPOSSIBLE
OTHER	NON

FIG. 5

DOMAIN NAME : abc.co.jp

NAME	DATA CLASS	RECORD TYPE	DATA
abc.co.jp	I N	M X	mail.gate
mail-gate	I N	A	123.2.0.20
ifax1	I N	F X	KIND OF APPARATUS1 A4, color, JBIG, S/MIME, . . .
ifax2	I N	F X	KIND OF APPARATUS2 B4, B/W, MR, PGP/MIME, . . .
.	.	.	.
.	.	.	.

FIG. 6

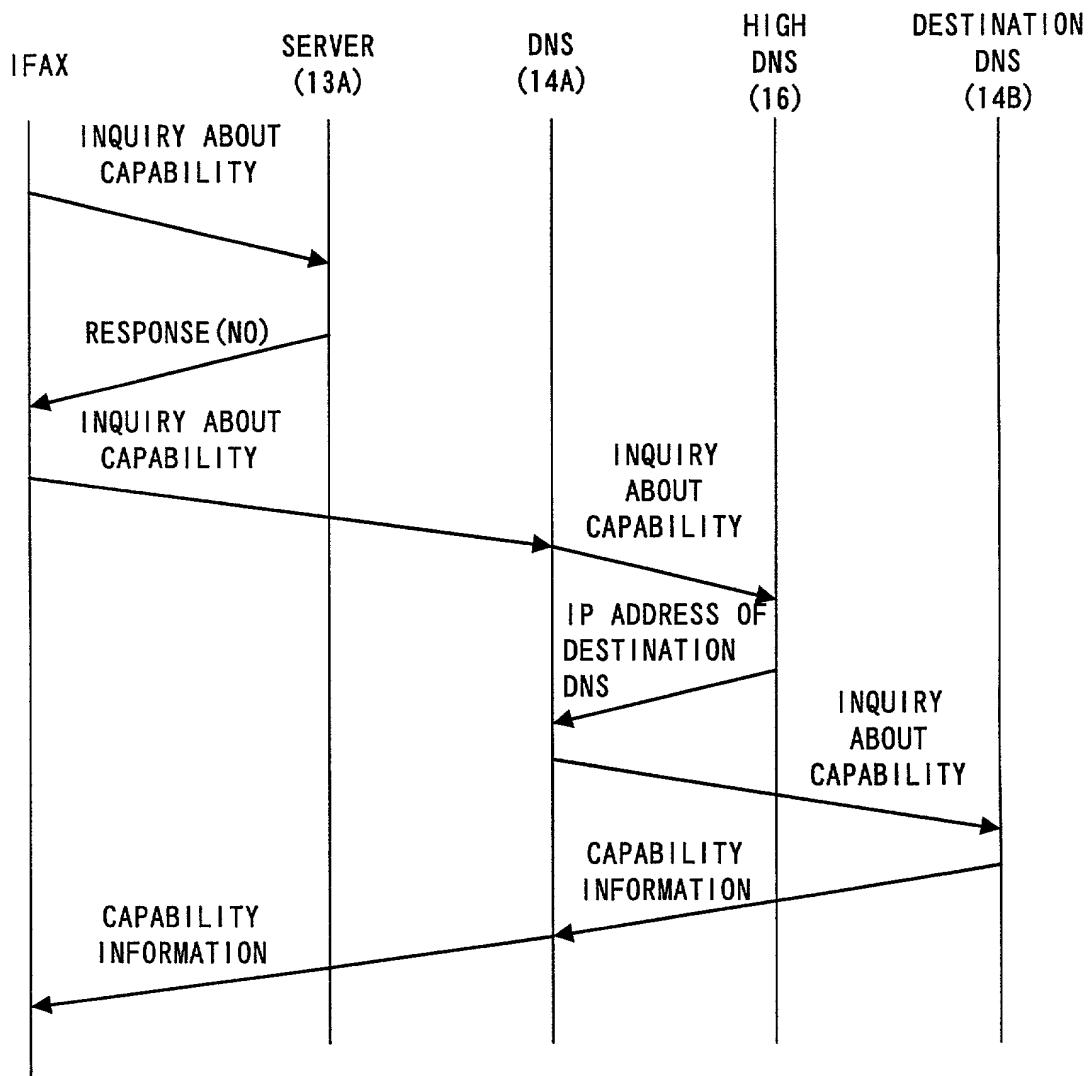


FIG. 7

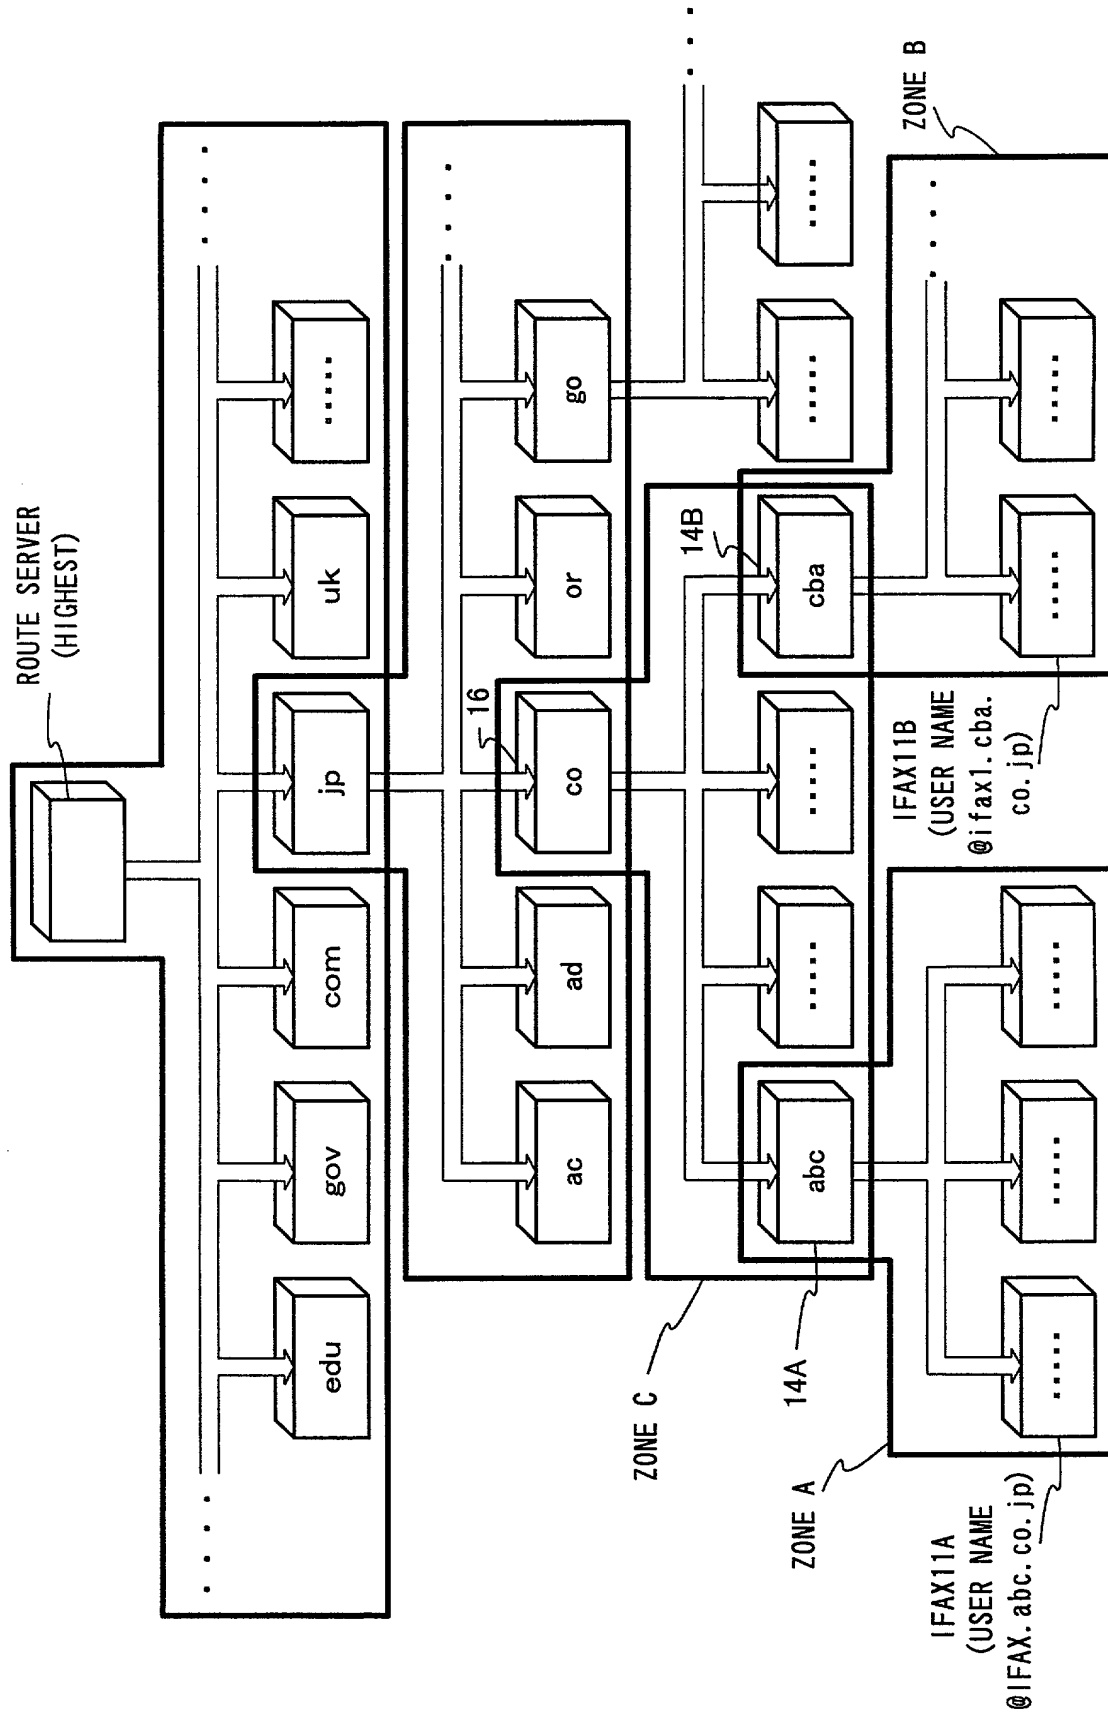


FIG. 8



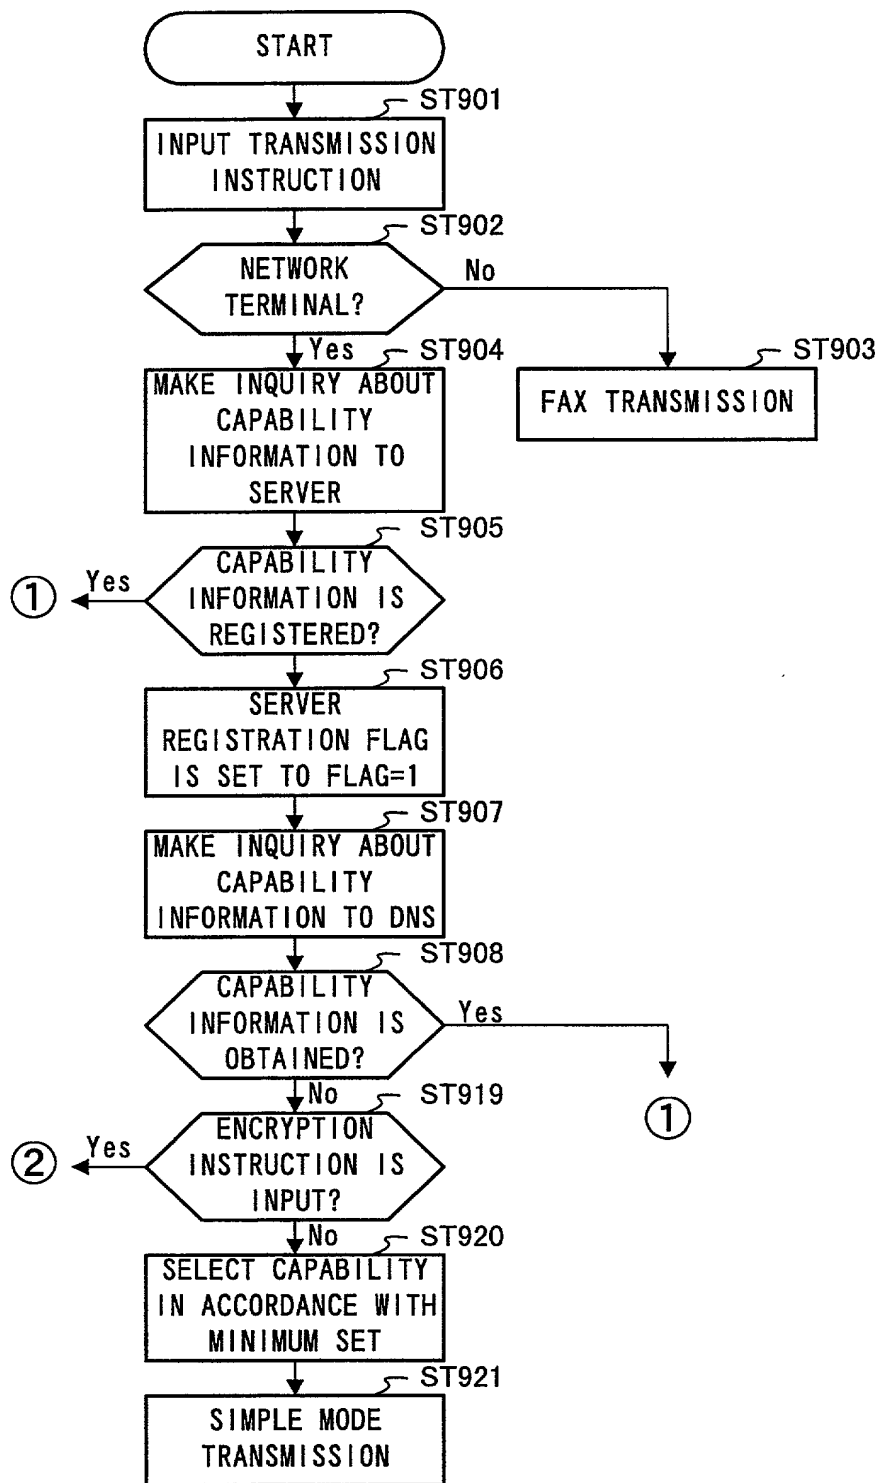


FIG. 9

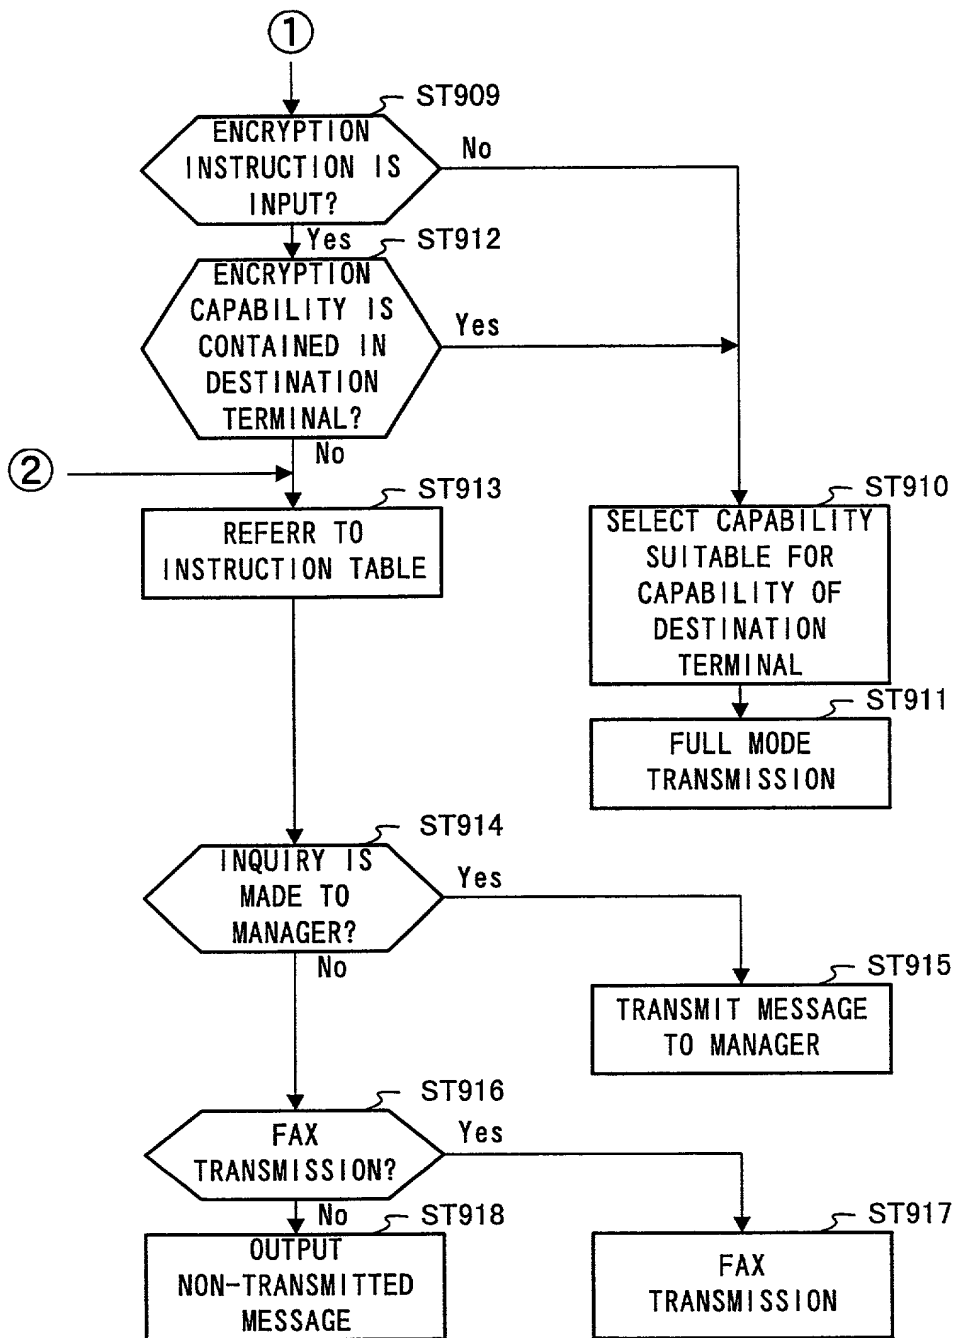


FIG. 10

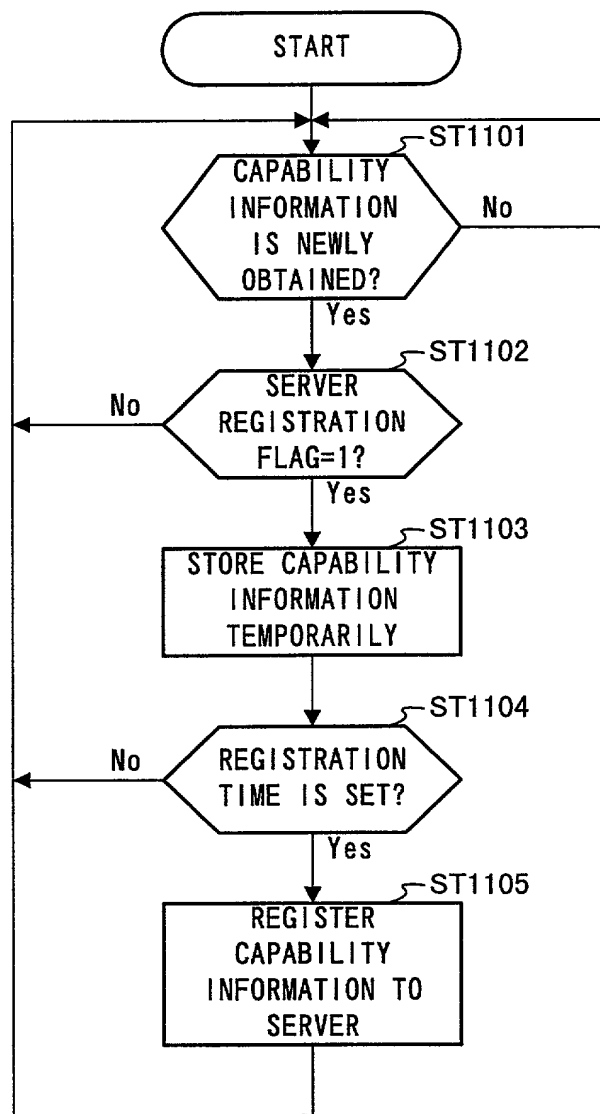


FIG. 11

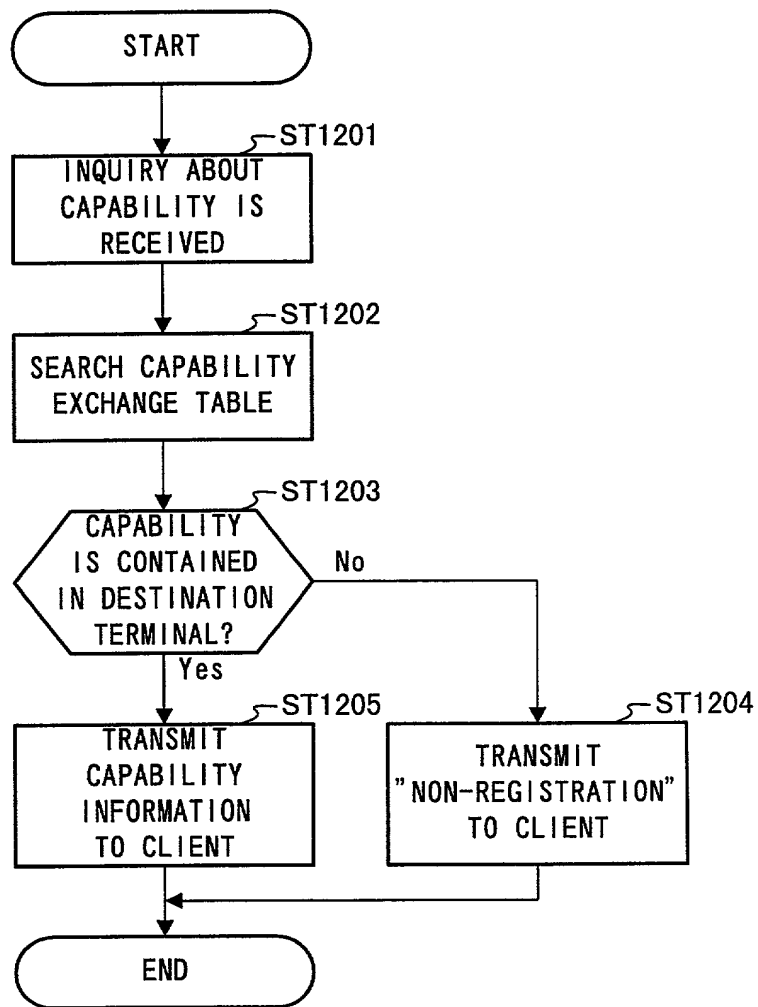


FIG. 12

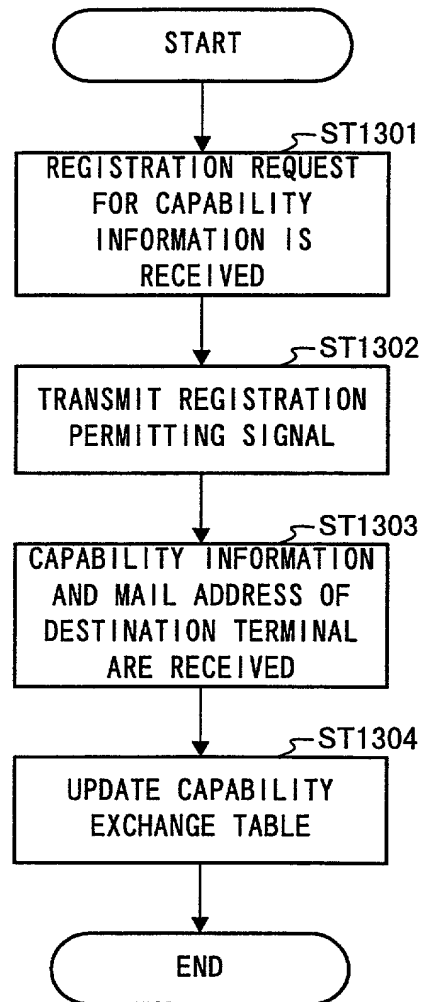


FIG. 13

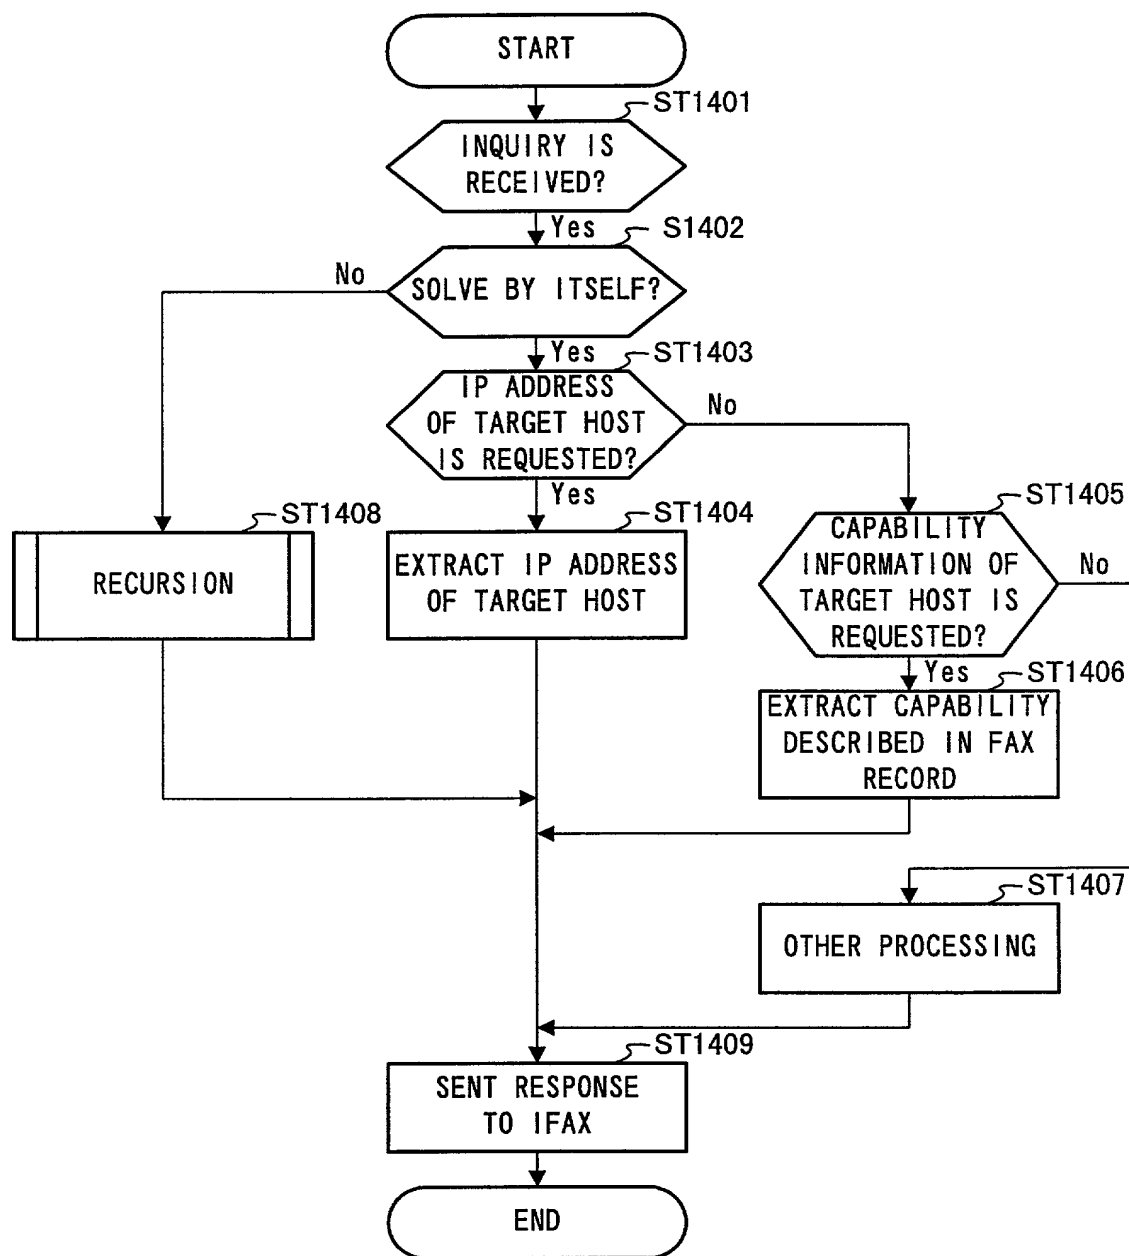


FIG. 14

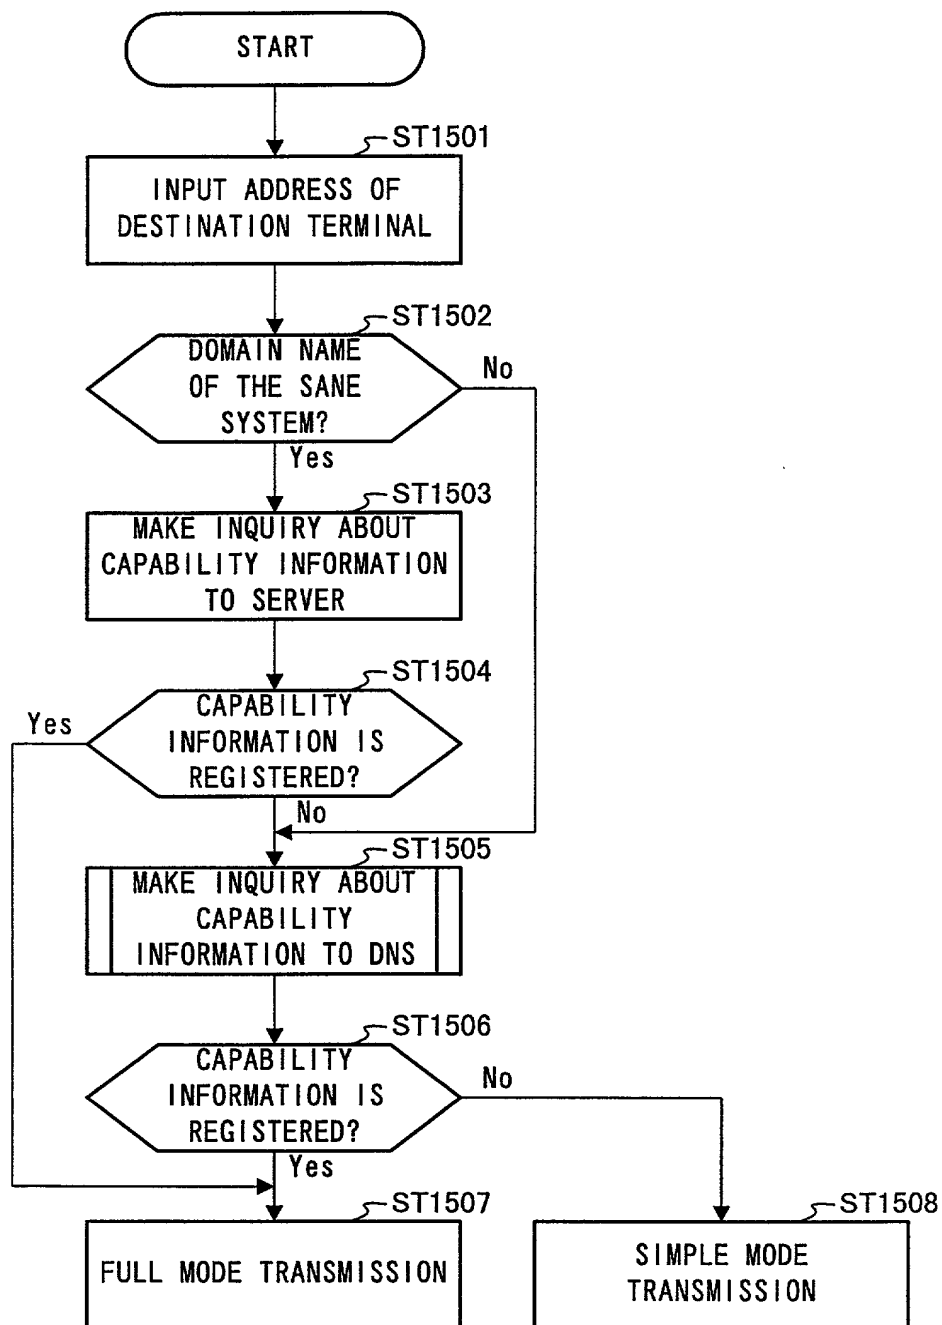


FIG. 15

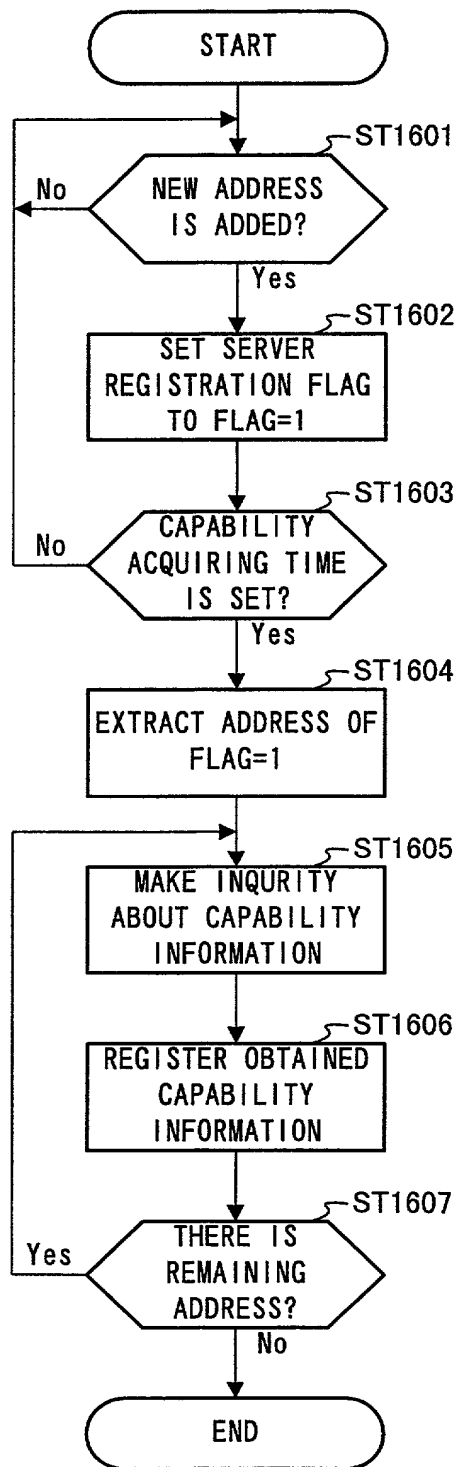


FIG. 16



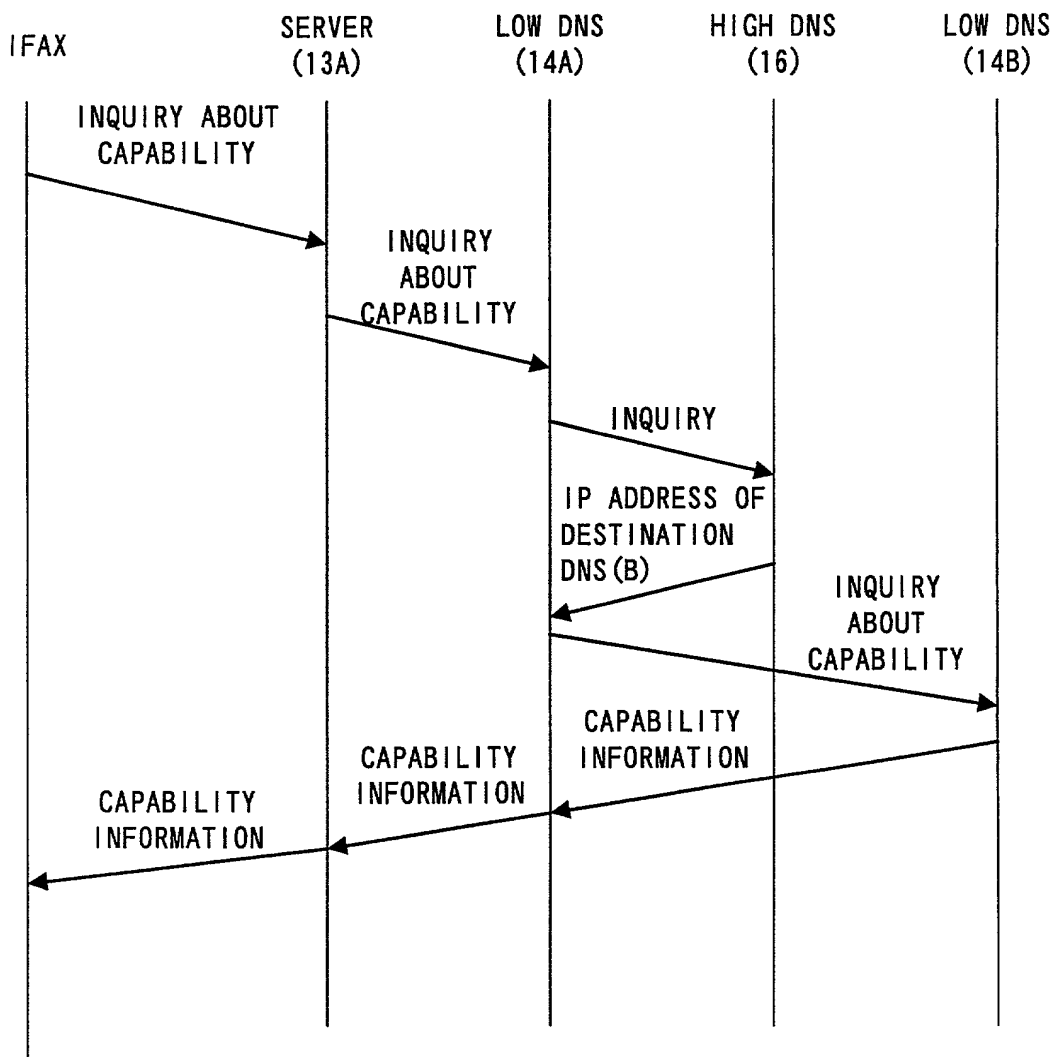


FIG. 17

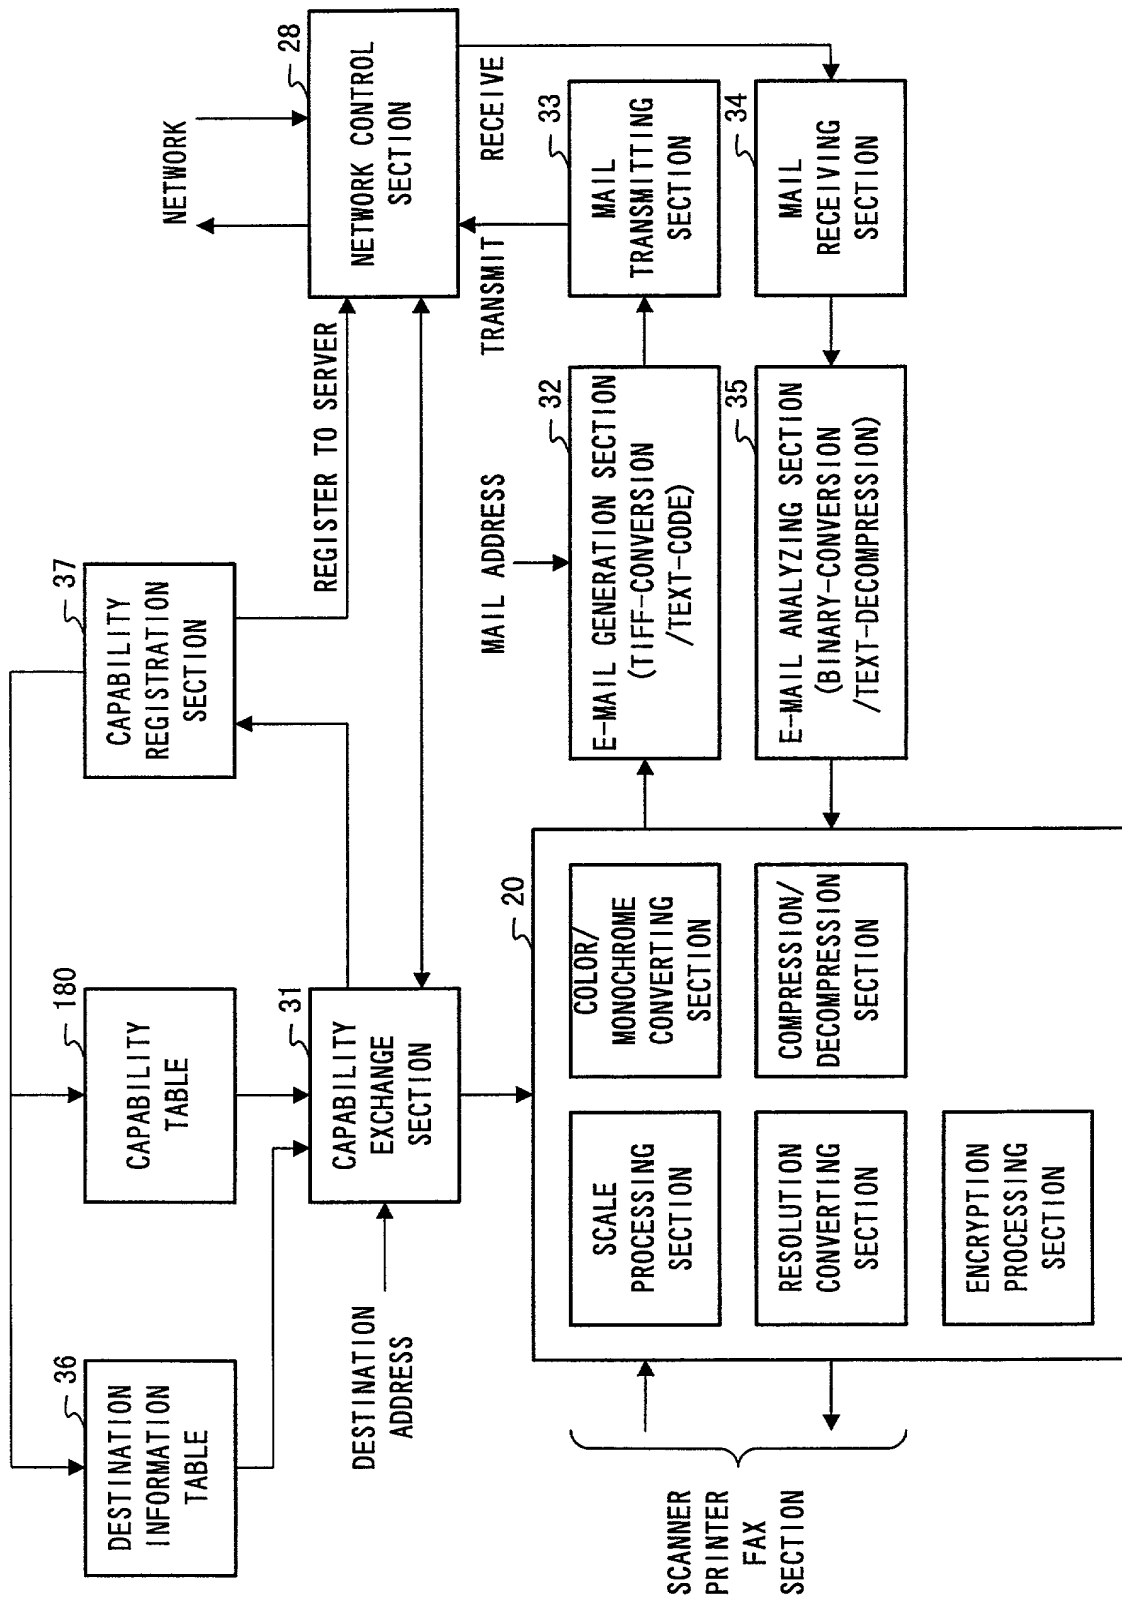


FIG. 18

DESTINATION INFORMATION TABLE

ONE-TOUCH DIALING KEY	TELEPHONE NUMBER	MAIL ADDRESS	NAME OF KIND OF APPARATUS
0 1	03-XXX-0000	XXX@00.CO.jp	X X X X
0 2		△△@XX.CO.jp	〇〇〇 X
		000@XX.CO.jp	X X 〇〇

FIG. 19

CAPABILITY TABLE

NAME OF KIND OF APPARATUS	REGISTRATION CAPABILITY	
	CAPABILITY ITEMS	CAPABILITY CONTENT
X X X X	RESOLUTION	. . . . .
	PAPER SIZE	A 4, A 3
	COMPRESSION FORMAT	. . . . .
	ENCRYPTION FORMAT	IMPOSSIBLE
	COLOR	IMPOSSIBLE
X O O O		

FIG. 20

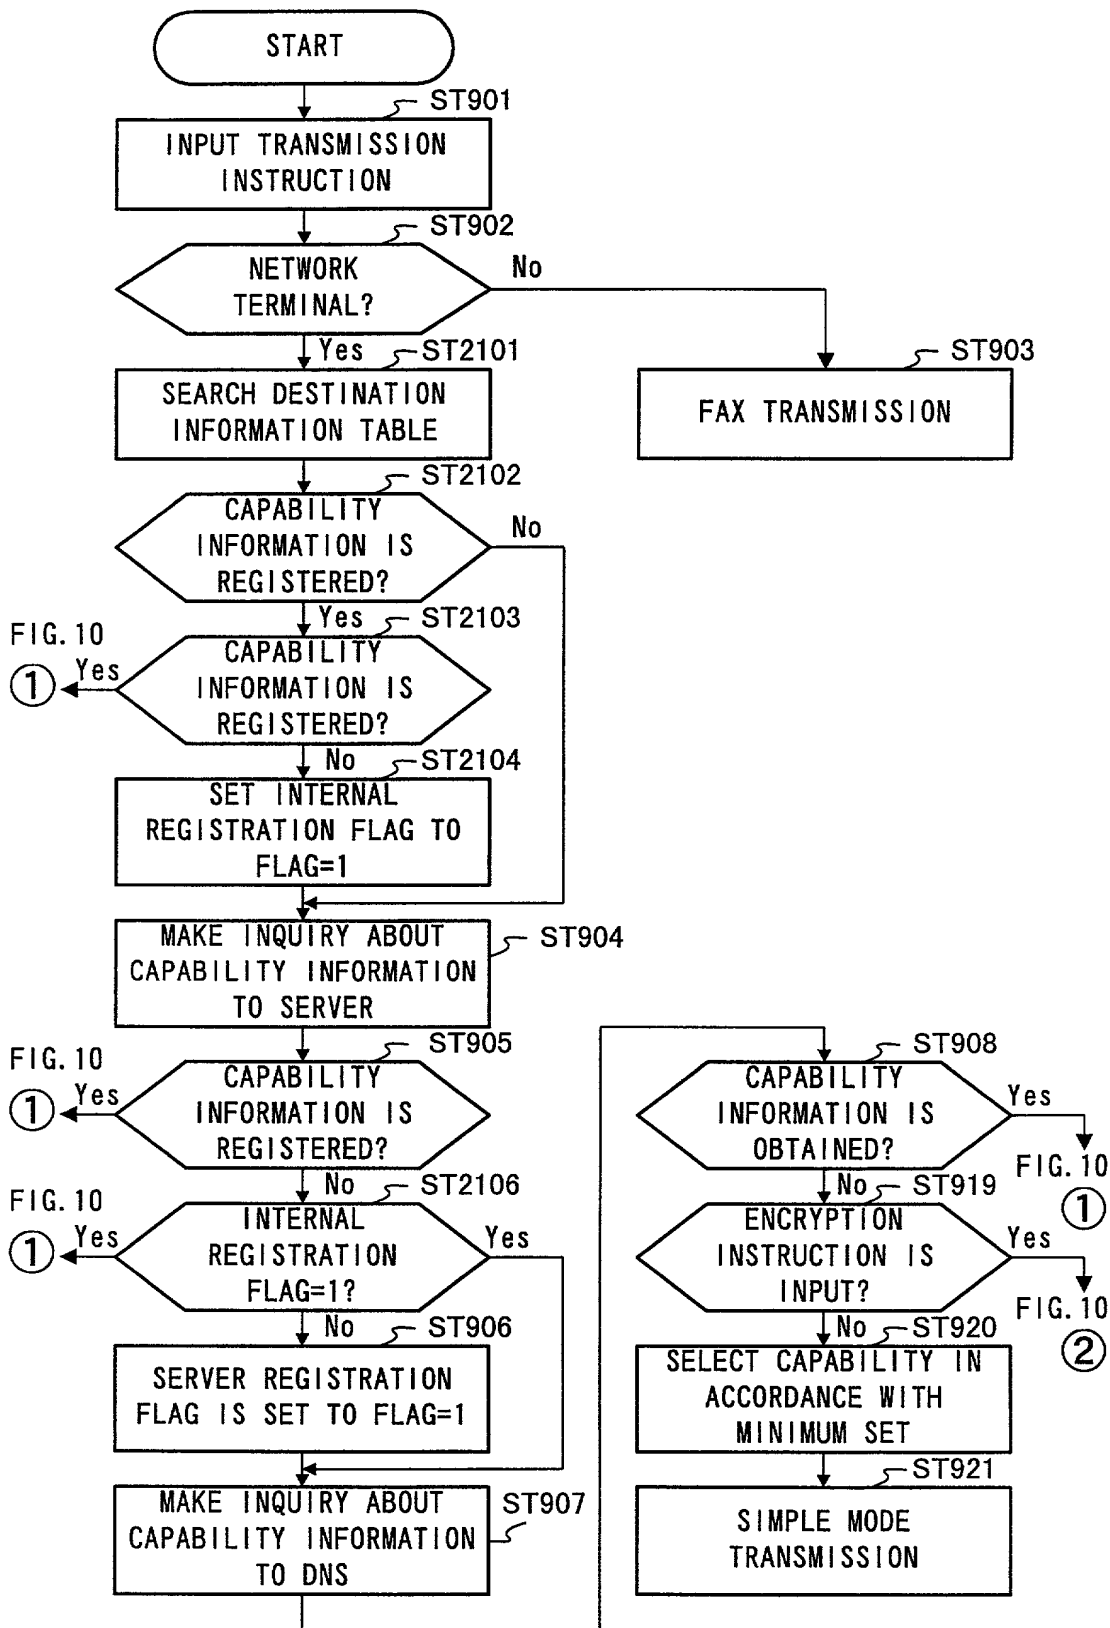


FIG. 21

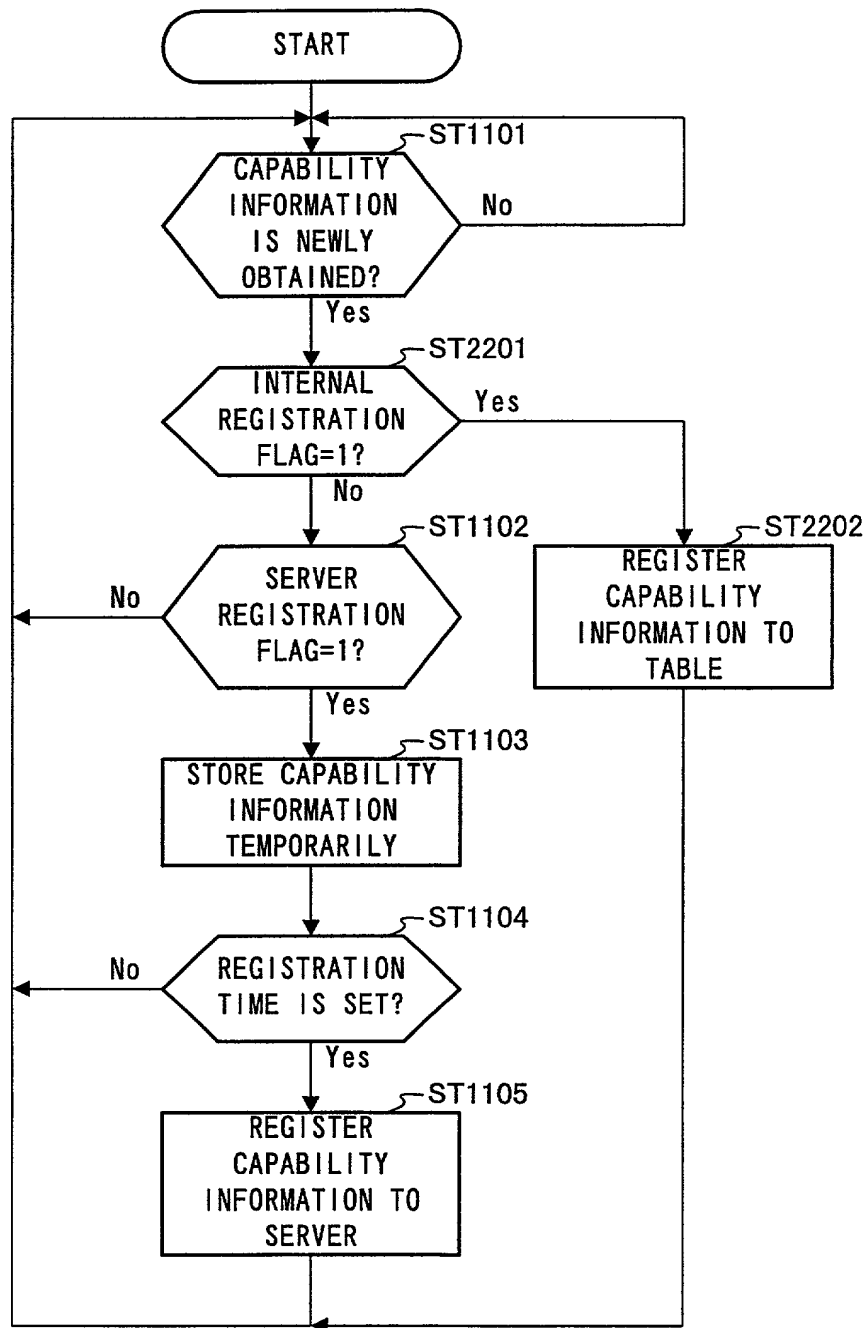


FIG. 22

# Declaration and Power of Attorney For Utility or Design Patent Application

## 特許出願宣言書

### Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する:

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である(一人の氏名のみが下欄に記載されている場合)か、もしくは本来の、最初にして共同の発明者である(複数の氏名が下欄に記載されている場合)と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE COMMUNICATION APPARATUS, SERVER

APPARATUS, AND CAPABILITY EXCHANGING

METHOD

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119(a-d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the "No" box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior foreign applications  
先の外国出願

JP11-088236	JAPAN	30/March/1999
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)

Priority claimed  
優先権の主張

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし

# Japanese Language Utility or Design Patent Application Declaration

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Number)  
(番号)

(Day/Month/Year Filed)  
出願の年月日

(Number)  
(番号)

(Day/Month/Year Filed)  
出願の年月日

(Number)  
(番号)

(Day/Month/Year Filed)  
出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願、又は第365条(c)項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の態様で、先の合衆国特許出願又はPCT国際出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)  
(出願番号)

(Day/Month/Year Filed)  
(出願の年月日)

(現況)  
(特許済み、係属中、放棄済み)

(Status)  
(Patented, pending, abandoned)

(Application No.)  
(出願番号)

(Day/Month/Year Filed)  
(出願の年月日)

(現況)  
(特許済み、係属中、放棄済み)

(Status)  
(Patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとずいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以下の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.



## Japanese Language Utility or Design Patent Application Declaration

委任状: 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本順の手続きを遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum  
Bruce H. Bernstein  
Roger P. Glass  
James L. Rowland  
Arnold Turk

Reg. No. 28,394  
Reg. No. 29,027  
Reg. No. 30,841  
Reg. No. 32,674  
Reg. No. 33,094

Address: **GREENBLUM & BERNSTEIN, P.L.C.**  
1941 ROLAND CLARKE PLACE  
RESTON, VA 20191

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

**CUSTOMER NUMBER 7055**

The appointed attorneys presently include:

直接電話連絡先 : (名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

**GREENBLUM & BERNSTEIN, P.L.C.**  
(703)716-1191

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor Kiyoshi TOYODA
同発明者の署名 日付	Inventor's signature Date <i>Kiyoshi Toyoda</i> 11. May. 1999
住所	Residence 1-10-31, Kita, Kunitachi-shi, Tokyo 186-0001 Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address 1-10-31, Kita, Kunitachi-shi, Tokyo 186-0001 Japan
第2の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any
同第2共同発明者の署名 日付	Second Inventor's signature Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)